LED Technologies
Creative LED & Effect Technology for the Trade Professional

Studio Flex

StudioFlex MW Cool White LED Strip 5500-6500K 24V 96W IP67



Product Code:	100.693
Product Type:	StudioFlex
Guarantee Period:	5 Years

Features & Benefits:


- Milky White Coated LED Strip Light
- Must be used as a full 5m roll
- 120 x 3528 LED's Per Metre
- 19.6 Watts Per Metre
- Built with high quality materials
- 5 Year warranty
- 5 Metre Roll
- Professional grade lighting solution

550g /roll *appx*

2oz *PCB Weight*

Colour:	Cool white 5500-6500K
Power	96W
Current:	800mA/M
Input Voltage:	24V DC
Cut Intervals:	50mm
LED Quantity:	120 LEDs per Metre
LED Spacing:	8.3mm
LED Type:	SMD2835
Size:	12x4.2x5000mm Roll
CRI Rating:	>80
Dimmable:	Yes
Lumens per LED:	16lm per LED
Lumens per Metre:	1400lm /m
Light intensity per LED:	4800-5000mcd
Power Consumption per Metre:	19.2W
IP Rating:	IP67
Average LED Lifetime:	50,000 Hours
Reel Length:	5m
Peelable Back:	300LSE 3M adhesive tape
CE & RoHS:	Yes
Continuous Run:	5 metres
Base Type:	30cm tails and 30cm cable+DC connector

Dimensions (Unit: mm)

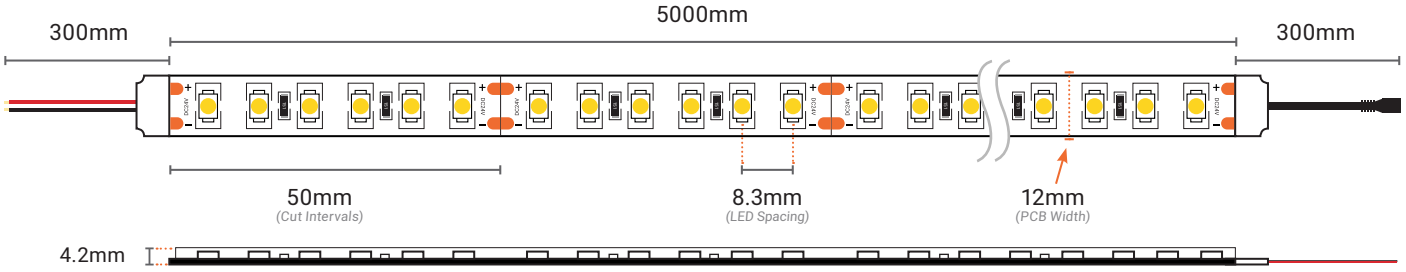

Notes:

- The LED Strip cutting points are situated 50mm apart from each other. The cutting marks are located on the two copper tabs every 50mm. The LED Strip must **NOT** be cut anywhere else.
- This StudioFlex LED Strip features 120 LEDs per metre, perfect for professional applications

UK CA | CE | RoHS Compliant

We reserve the right to change specifications without notice. E&OE

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Telephone: 01260 540014
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
www.ledtechnologies.co.uk


LED Technologies
Creative LED & Effect Technology for the Trade Professional


Studio Flex

StudioFlex MW Cool White LED Strip 5500-6500K 24V 96W IP67

100.693 Connection Diagram

RF Dimming Control Example

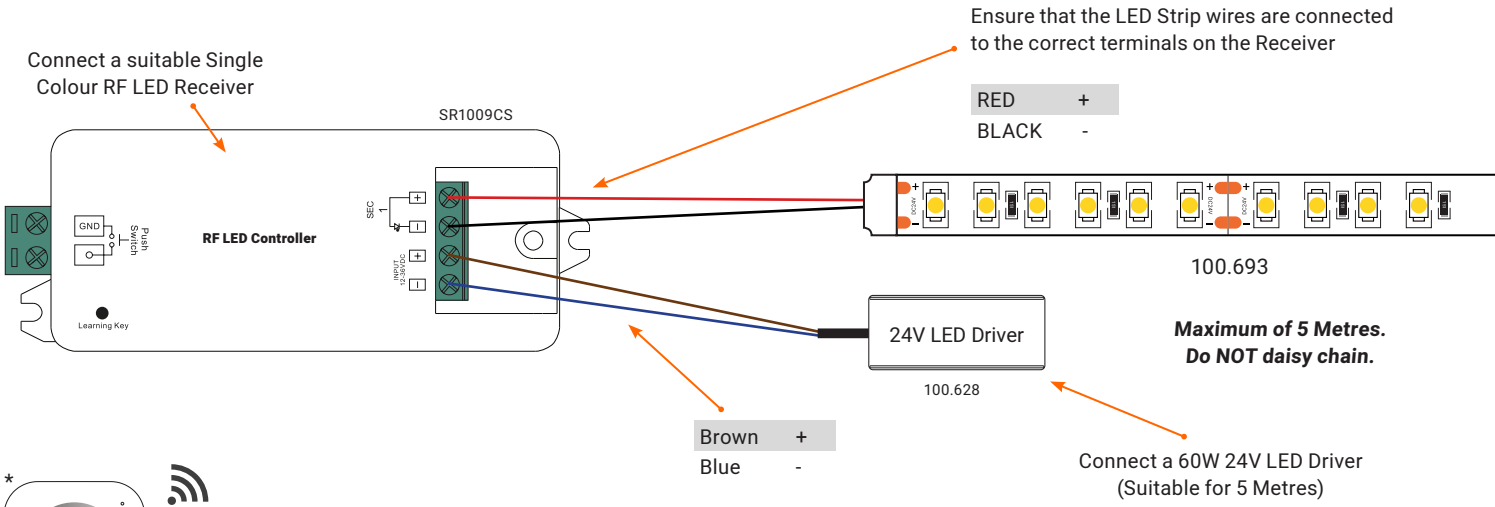



Sunricher Single Colour RF Controller

SR2819SDIM

Example of RF Control Method

RF WiFi DMX DALI 0-10V zigbee Z-WAVE

Notes:

- The StudioFlex Strip is powered by 48W, so we recommend a **60W LED Driver** to safely power **5 Metres** of the strip.
- Ensure that the LED Strip wires are connected to the correct terminals on the suitable LED Receiver chosen. Please see the diagram above for the correct terminals to attach each wire to.
- **Our range of LED Strip is not limited to RF Control Methods. Many other control options are available for the LED Strip including DMX, DALI ZiGBEE & more.*

+10% Tolerance on all Specifications. Colours can be variable.
We reserve the right to change specifications without notice. E&OE

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Telephone: 01260 540014
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
www.ledtechnologies.co.uk

UK CA CE RoHS Compliant