




















## 1. Product feature

This product uses WiFi + Bluetooth + 2.4G wireless transmission technology, low power consumption, strong anti-interference ability.

WiFi + Bluetooth connect network can greatly enhance the connect network experience. When the router is disconnected, Bluetooth can also directly connect and control equipment at close range.

After successful network configuration using [MiBoxer Smart] APP to achieve wireless dimming, remote control, group control, scene control, timing control, music movement, biorhythm, sleep plan, wake plan, one key execution, automation, etc. functions. And it supports 2.4G remote control.

	16 Millions of colors to choose		Dim brightness / saturation		Mix red, green and blue light to adjust color temperature	
	Smartphone APP control		Support remote control (control distance 30m)		Support third party voice control	 Group control
	Support music rhythm		Biorhythm		Tap-to-Run & automation	 Support scene customization
	Device sharing		Sleep / wakeup plan		Timing setting / countdown turn on / off LED light	 Do not disturb mode
	Support PUSH dimming		2.4G wireless transmission technology		WiFi wireless control support long-range control	
	Auto-transmitting & Synchronization (only for remote control dimming)					

## 2. Product Parameter

Model No.: WL3P75V24

Input Voltage: AC100V~240V 50/60Hz

Output Voltage: DC24V

Output current: Max 3A

WiFi Standard: IEEE 802.11b/g/n 2.4GHz


RF: 2.4GHz TA: 40°C TC: 85°C

Remote Control Distance: 30m

Bluetooth Protocol: Bluetooth 4.2


**75W RGB Dimming LED Driver**  
(WiFi + 2.4G)

Model No.: WL3P75V24

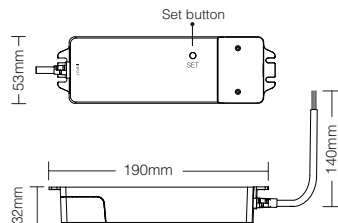

## 3. Connection Diagram

Input: AC100V~240V

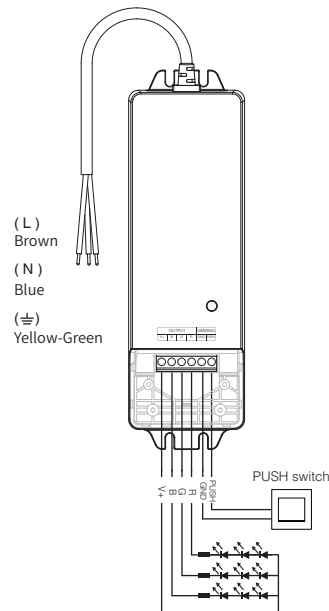

## 4. Link Code / Unlink Code with remote


### 4.1 Link code

- Making dimming LED driver to enter Link code / Unlink code mode:  
Method 1: short press "SET" button one time.  
Method 2: switch off dimming LED driver, switch on again after 10 seconds.
- Short press zone "I" or "ON" 3 times on remote within 3 seconds, light blinking 3 times slowly means the linking is done successfully.

### 4.2 Unlink code

- Making dimming LED driver to enter Link code / Unlink code mode:  
Method 1: short press "SET" button one time.  
Method 2: switch off dimming LED driver, switch on again after 10 seconds.
- Short press zone "I" or "ON" 5 times on remote within 3 seconds, light blinking 10 times quickly means the unlinking is done successfully.


### 4.3 Compatible with following remote controls (Purchase separately)

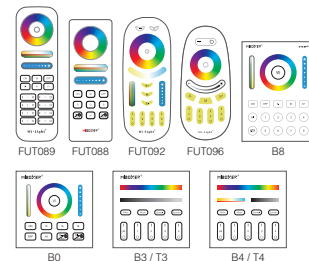

5. Auto-transmitting & Synchronization (only for remote control)

5.1. Signal transmitting  
Dimming LED driver can transmit the signals from the remote control to another one within 30m, as long as there is dimming LED driver within 30m, the remote control distance is unlimited.

5.2. Modes synchronization  
Different dimming LED drivers can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

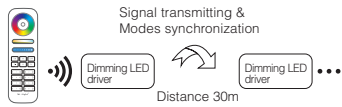

6. Dynamic mode selection (only for remote control)

6.1. Select dynamic mode sheet 1 :  
Dimming LED driver is powered off for 10 seconds and then powered on, or short " SET " button one time. Press the " S+ " button 5 times within 3 seconds, the blue light blink 3 times slowly, selection is done successfully.

6.2. Select dynamic mode sheet 2 :  
Dimming LED driver is powered off for 10 seconds and then powered on, or short " SET " button one time. Press the " S- " button 5 times within 3 seconds, the yellow light blink 3 times slowly, selection is done successfully.

6.3. Dynamic mode sheet 1(default in factory)


Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

6.4. Dynamic mode sheet 2 (need to switch manually)

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Colors gradual change	Adjustable
2	White light Gradual change	
3	RGB gradual change	
4	Seven colors jump to change	
5	Jump to change randomly	
6	Red light gradual change +Flash 3 times	
7	Green light gradual change +Flash 3 times	
8	Blue light gradual change +Flash 3 times	
9	White light gradual change +Flash 3 times	

7. Attention

- 7.1. Please check whether the voltage of the power supply is in accordance with the dimming LED driver, and please check the connection of both the cathode and anode, otherwise the controller will be broken.
- 7.2. Please do not use the controller in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be affected seriously.
- 7.3. Non-professional users are not allowed to disassemble the equipment directly, otherwise the equipment may be damaged.




8. APP Installation

8.1. Download and install [MiBoxer Smart] APP  
Search for [MiBoxer Smart] in Apple or Google store.  
Please click " Register " button to create account while using it in the first time, Log in directly if you already had account.




8.2. Network Configuration


- (1) Connect dimming LED driver with power supply.
- (2) Confirm indicator light is flashing quickly (2 flashes per second)  
If indicator light isn't in fast flashing state, there are two ways to enter:
  - Long press " SET " key until indicator light flashing quickly.
  - Power off and on controller 3 times.
- (3) Connect phone with home WiFi network in the 2.4GHz frequency.
- (4) Open homepage of APP and click " + " button at the upper right corner of page.

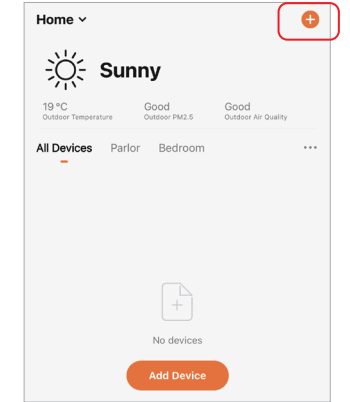


- (5) Click " WiFi Lighting " on the left side of page and then click " Dimming LED Driver "
- (6) Follow APP prompts to complete configuration.

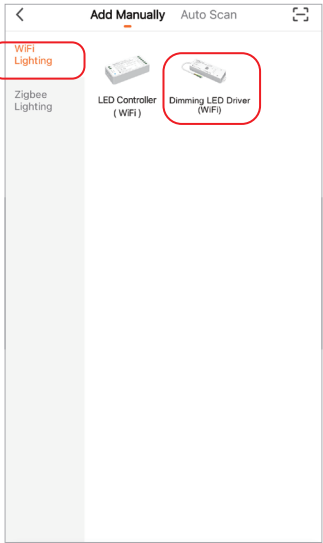


- (7) Added devices will be displayed on home page after network configuration is successful.
- (8) Click device you want to control to enter the control interface.

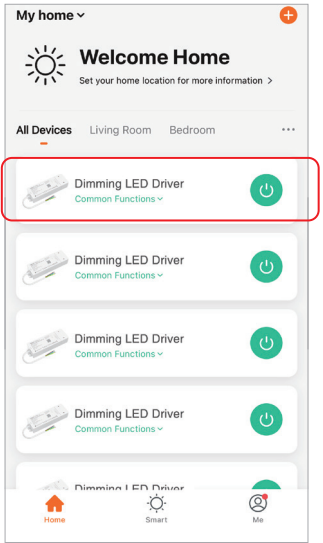


- ### 8.3. APP control
- (1) Click " device " or " group " you want to control on homepage to enter control page, where you can control color, saturation, brightness, color temperature, and scene.
  - (2) Click music to enter music rhythm mode, light will change with rhythm of music.
- Note: Music rhythm mode requires phone keep on this page.**

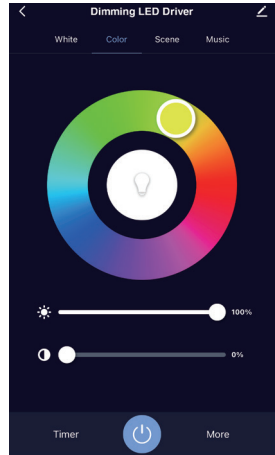

- (3) Click " More " to enter biorhythm, timing, sleep plan, wake plan, power-on response setting.
- (4) After opening the " Do Not Disturb Mode " in the power-on response, turn on light needs power on twice when light is powered off in the off state. (Applicable for frequent power outages power on response setting)

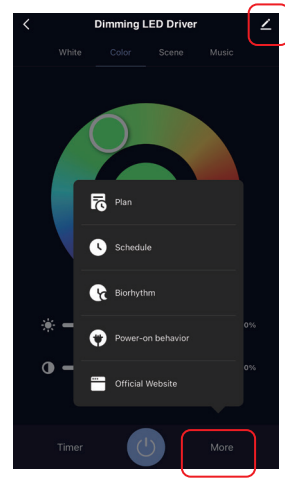


- ### 8.4. Device name editing, third-party control, device sharing, group control.
- (1) Click "edit" on the upper right corner of control page to enter edit page, where you can modify device name, icon, etc.
  - (2) Click icon under third-party control to view detailed description of third-party control.
  - (3) Click " Share Device " to share device with family and friends.
  - (4) Click " Create Group " and follow APP prompt after setting is completed, the device can be controlled by group.

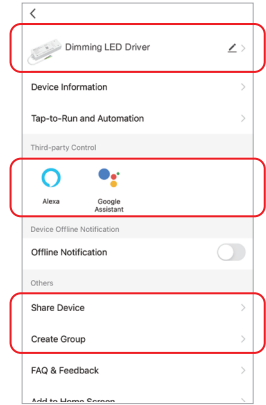


### 8.5. Intelligent control

- (1) Click "Smart" at the bottom.
- (2) Click "+" in the upper right corner to create intelligent control.

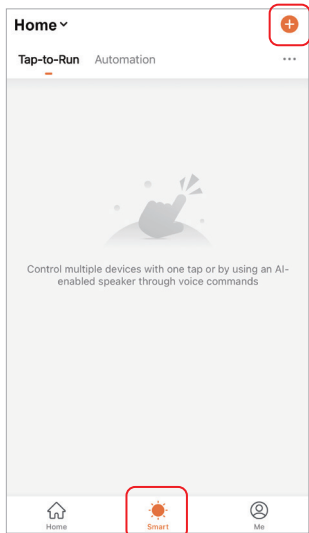


- (3) In the page of creating smart, you can set command to be executed under the specified conditions (such as: turn on or turn off light, color, brightness, mode, etc.)

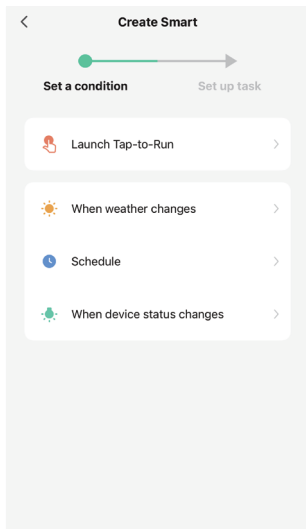


### 9. Support Amazon Alexa Control

Please search "Smart Life" skill in Alexa APP and activate the skill.

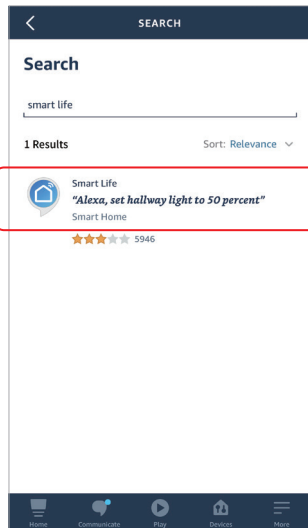

### 10. Support Google Home Control

Please search "Smart Life" skill in Google Home APP and activate the skill.

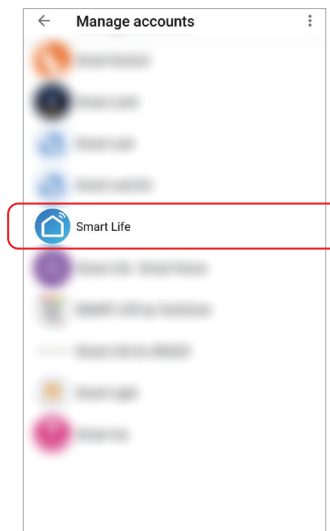

### 11. Bluetooth control instructions

When the router is disconnected, you can turn on the Bluetooth of your smartphone and connect directly controlled device at a short distance.

#### Switching Bluetooth control steps:

- (1) Complete the network distribution of the equipment.
- (2) Power off the router used for network configuration, turn off WiFi on the mobile phone, turn on Bluetooth, and wait for about 3-5 minutes to control.