









## Zigbee 3.0 Gateway

Model No.: ZB-Box1


### 1. Features

The product follows the standard protocol of Zigbee 3.0. Integrate WiFi and Zigbee communication methods. Through the MiBoxer Smart APP, user can add Zigbee device, group control, remote control, and third-party voice control to meet smart home and other applications.

-  Product follow Zigbee 3.0 standard protocol
-  Compatible with all Zigbee 3.0 product series, max 50 sub-devices can be connected
-  WiFi wireless control
-  APP control sub-devices under Zigbee gateway
-  Zigbee group control
-  Support music rhythm
-  Support Amazon Alexa and Google Assistant voice control
-  Support scene automation, support multiple control


### 2. Parameters

Model No.: ZB-Box1  
 Input: DC5V / 1A (Micro USB)  
 Working temperature: -10~40°C  
 Wireless technology: WiFi 802.11 b/g/n (Zigbee 802.15.4)  
 WiFi wireless frequency: 2.400-2.4835GHz  
 Zigbee wireless frequency: 2.400-2.480GHz  
 Transmitting power: WiFi 20dBm / ZigBee 10dBm  
 Max connected device: 50  
 Zigbee control distance: 100m (open area)

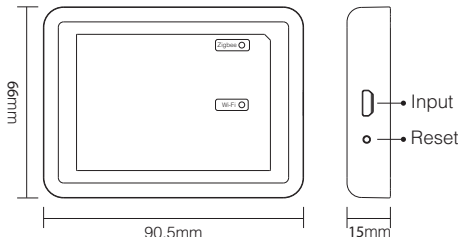

### 3. Device Installation

Please install device close to WiFi router.

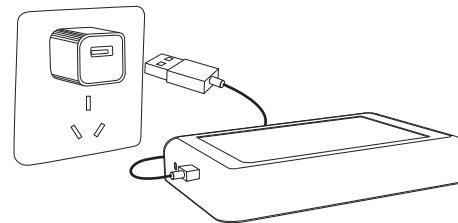

#### Indicator status description

Equipment status	Zigbee Indicator (Blue)	Wifi Indicator (Red)
Pairing wifi network	ON	Flash quickly
Hotspot (AP) network	ON	Flash slowly
Connect completed	OFF	ON
Add Zigbee device	Flash	ON
WiFi offline	OFF	OFF

### 4. APP Installation

#### 4.1. Download and install "MiBoxer Smart" APP

Search for "MiBoxer Smart" in Apple or Google store or scan following QR code to download and install the app.



Please click "register" button to create account while using it in the first time, Log in directly if you already had account.

#### 4.2. Connect device with power supply and ensure that smart phone connect to WiFi network successfully


### 5. Network Configuration

#### 5.1. Connect gateway with power supply.


#### 5.2. Confirm that WiFi indicator is flashing quickly (flashing 2 times per second)

(WiFi indicator is flashing quickly under factory setting)


(Please long press "Reset" button 5 seconds until wifi and zigbee indicator is off if indicator is not flashing quickly, indicator will be flashing quickly 20 seconds after restarting ).

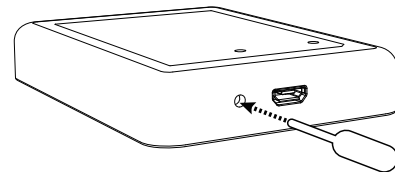

#### 5.3. Open APP homepage and click add button "+" in the upper right corner

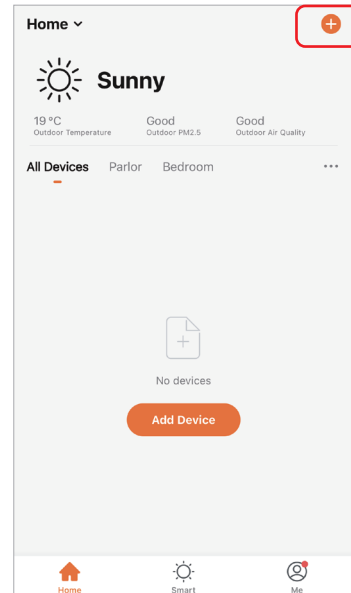



- 5.4. Click "Zigbee Lighting" on the left side of page and click "Zigbee 3.0 Gateway"
- 5.5. Follow the APP instruction to complete configuration

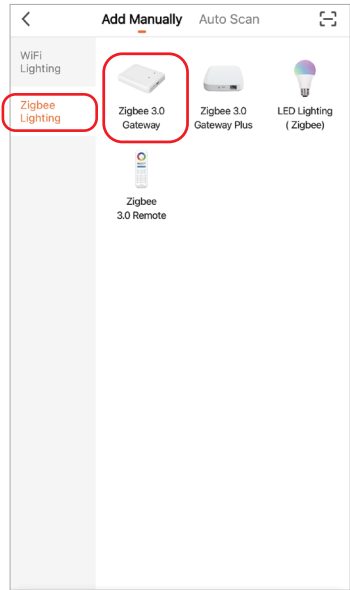


## 6. Add Zigbee sub-device

- 6.1. Click "Zigbee Gateway" on the home page of APP

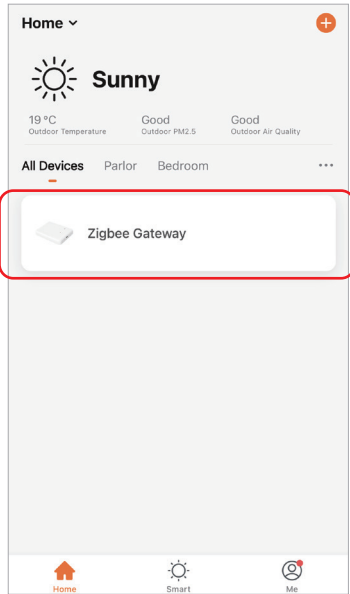


- 6.2. Click "Add subdevice" button and follow the APP instruction to complete device
- 6.3. Click  in the upper right corner to modify device name

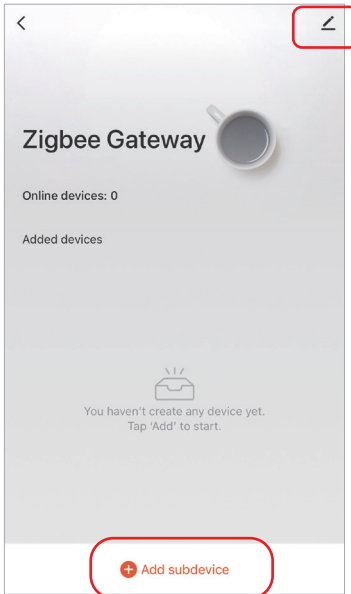


## 7. Support Amazon Alexa Control

Please search "Smart life" skill in Alexa APP and activate the skill

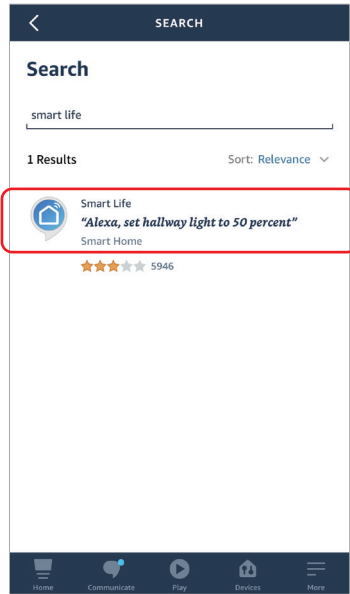

## 8. Support Google Home Control

Please search "Smart life" skill in Google Home APP and activate the skill

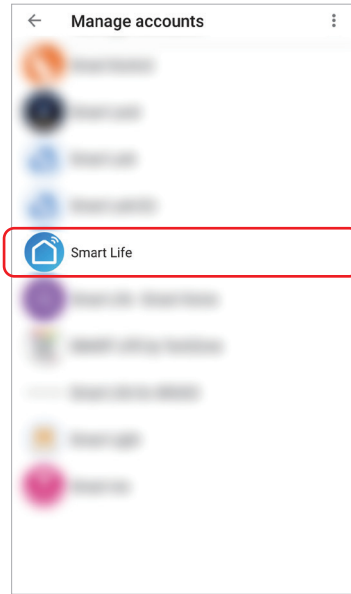

## 9. Warning

- 7.1. Keep equipment to stay away from strong magnetic field, otherwise it will affect control distance seriously.
- 7.2. Please do not install equipment in direct sunlight, humid or other high temperature area, working temperature is -10~40°C
- 7.3. Non-professional user cannot disassemble device directly, otherwise device may be damaged.



Scan QR code to watch video instruction



Made in China