


Dual Color DMX512+RF Controller




Important: Read All Instructions Prior to Installation

Function introduction

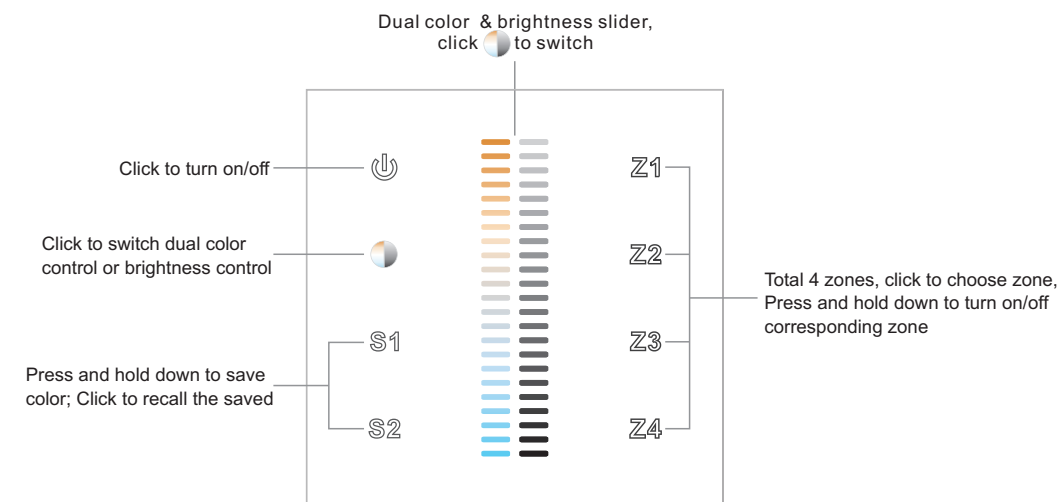

Front side

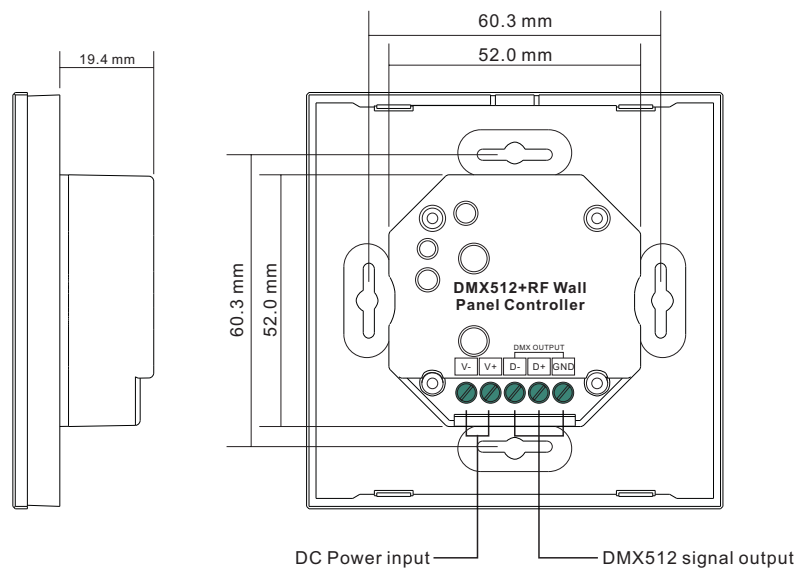

Back side

09.280BDRF.04188


Product Data

Output Signal	DMX512+RF signal
Power Supply	12-24VDC
Power consumption	200 mA
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	86x86x29.1mm

- Touch sensitive
- Glass interface(white & black)
- Standard DMX512+RF Signal output
- Radio frequency: 869.5/434MHz
- Control CCT color
- Control 4 zones synchronously and separately
- Waterproof grade: Ip20

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

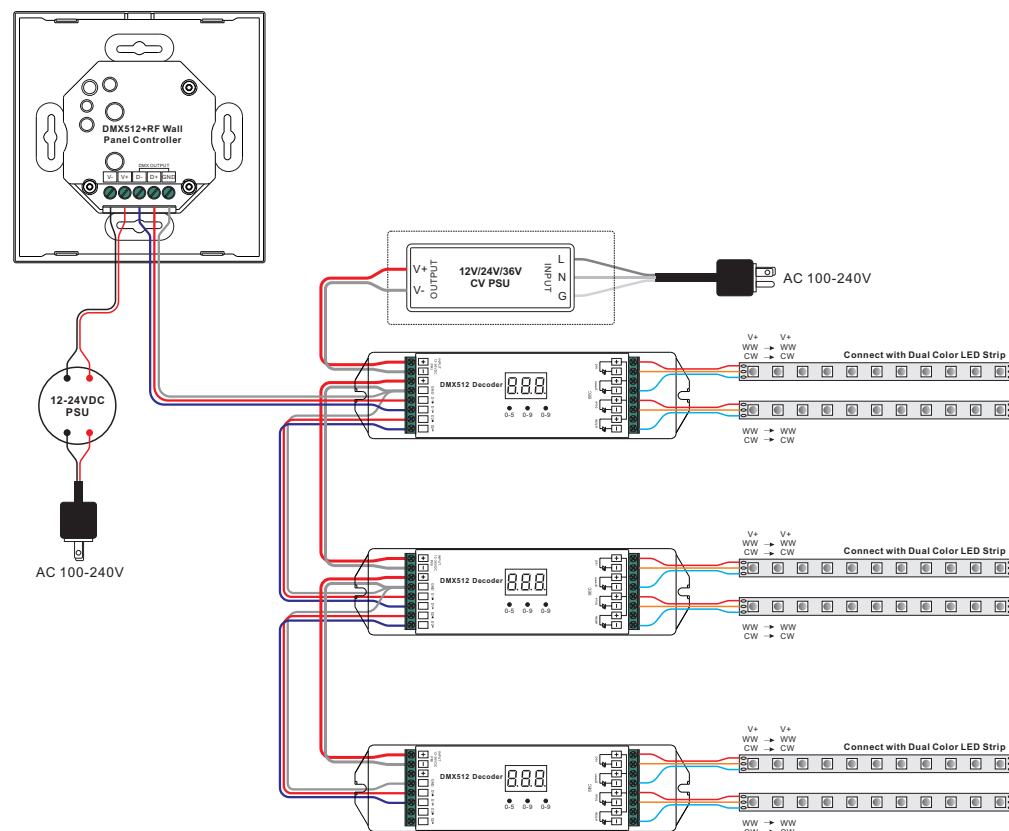

Set DMX Address

This DMX master controller controls 4 zones of DMX decoders by setting DMX decoders' address as follows:
 DMX decoders with address 001 will be controlled by zone 1,
 DMX decoders with address 005 will be controlled by zone 2,
 DMX decoders with address 009 will be controlled by zone 3,
 DMX decoders with address 013 will be controlled by zone 4.

Operation

Pair with RF receivers:

Turn on the wall panel controller → Click "Learning Key" on RF receiver, or re-power on the receiver three times → Click a zone number on the wall panel controller: **Z1-Z4** → Touch the color slider,

→ LED lights connected with the RF receiver will flicker once → The receiver is paired to the selected zone of the remote successfully.

Play the remote after pairing:

Turn on the wall panel controller → Click the paired zone number/numbers → Touch color slider or other buttons to do the controlling.

How to delete the pairing:

Press and hold down "Learning Key" on the receiver for over 3 seconds until connected LED lights flicker twice, which means the pairing is deleted successfully.

Installation

