LED Technologies
Creative LED & Effect Technology for the Trade Professional

LED Tech

LEDTech | 200W 24V TRIAC Dimmable LED Driver



Features & Benefits

- Ideal for powering 24V Dimmable LED Lighting products
- Recommended load 175W
- 255 x 72.1 x 43mm
- Highly efficient
- We recommend using a dimmer that is rated 1.5 x the driver value, so for this unit please make sure that the dimmer switch used is rated at a minimum of 300W

Quick Specs

24V	200W	IP67
Voltage	Wattage	IP Rating

Full Specification

Prouct code	101.106
Rated Output Voltage	24VDC
Rated Output Current	8.33A
Rated Output Power	200W
Output Voltage Tolerance	±0.5V
Output Voltage Regulation	±0.5%
Output Load Regulation	±1%
Input Voltage Range	110-277 VAC
Input Frequency Range	47-63Hz
Input Power Factor (Typ.) @ Full Load	0.99 @ 120VAC 0.96 @ 277VAC
Input THD (Typ.) @ Full Load	<20% @ 120VAC & 277VAC
Input Efficiency (Typ.) @ Full Load	89% @ 120VAC 90% @ 277VAC
Input AC Current (Max.)	2.2A @ 110VAC
Input Inrush Current (Typ.)	15A, 50%, 1.4ms @ 120VAC 30A, 50% 1.4ms @ 277VAC
Input Leakage Current	<0.5mA
Protection Short Circuit	Hiccup Mode. Recovers automatically after fault condition is removed
Protection Over Loading	<120% Hiccup Mode. Recovers automatically after fault condition is removed
Protection Over Temperature	100ºC±10ºC Shut Down o/p Voltage. Automatically recover after cooling
Working Temperature	-40~+80ºC
Working Humidity	20~90%RH, non-condensing
Storage Temperature Humidity	-40~+80ºC, 10~90%RH
Temperature Co-efficient	±0.03%/ºC (0~50ºC)
Vibration	10~500Hz, 5G 10min./1 cycle, period for 60min each along X, Y, Z axis

Continued overleaf

LED Technologies
Creative LED & Effect Technology for the Trade Professional

LED Tech


LEDTech | 200W 24V TRIAC Dimmable LED Driver

Safety Standards	UK CA, CE
Net. Weight	1.6KG
Product Dimensions	273.4 x 78 x 46mm (L x W x H)
Packing	10pcs/CTN Size: 340 x 290 x 190mm (L x W x H)

Notes:


1. All parameters if NOT specially mentioned are measured at 120V AC input, rated load and 25ºC of ambient temperature
2. To extend the drivers life, please reduce the loading at lower input voltage

PWM dimming curve

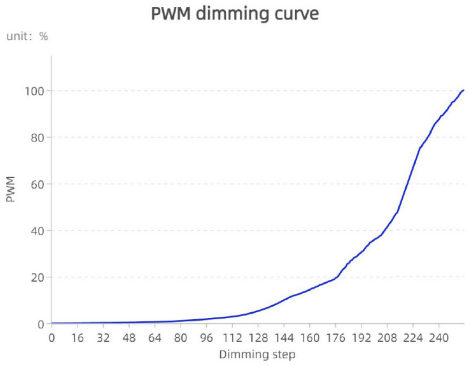

Schematic Drawing

Units: mm

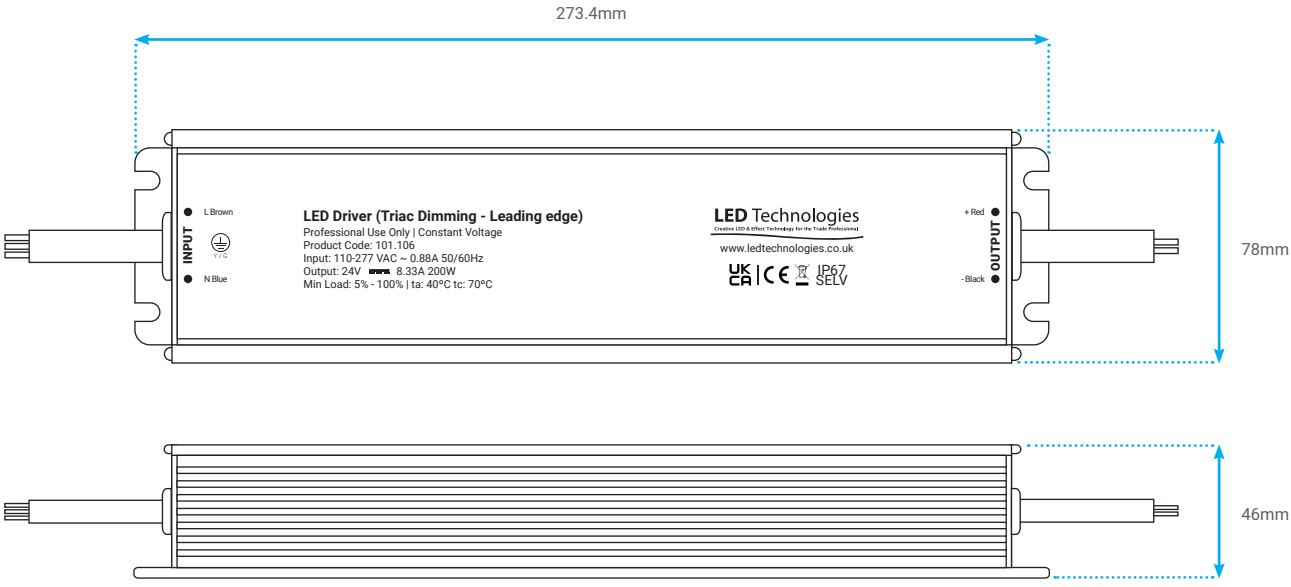

Technical Support

If you require any technical support of have an enquiry, please do not hesitate to contact one of our LED technical experts on the contact information provided.

Telephone: 01260 540014

Website: www.ledtechnologies.co.uk

The above data are typical values and may vary +/- 10%.
We reserve the right to change specifications without notice - E&OE.

RoHS Compliant