# P0 Rotating CCT control panel

Model No.: P0


## Product Feature

- Stepless dimming, color temperature and brightness adjustable
- 4096 levels of smooth dim., min. brightness can reach 0.1%
- Can pair with 12 remote controllers (control distance 30m)
- Auto-forwarding: The controller auto-forwards the signal directly, making the remote control distance infinite
- Supports Do Not Disturb mode setting, suitable for areas with frequent power outages to save electricity
- Support "Tuya Smart" APP control (2.4G gateway required)
- Support Alexa, Google Assistant, Yandex Alice, Tmall Genie, Xiaodu, Xiaoai (2.4G gateway required)





## Product Parameter

| | | | |
|---|---|---|---|
| Product Name: | Rotating CCT control panel | Dimming Level: | -10~40°C |
| Model No.: | P0 | Dimming Range: | 0.1~100% |
| Working voltage: | DC12V~48V | Dimming Curve: | Logarithm |
| Output current: | Max 12A | EMC Standards (EMC): | ETSI EN 301 489-1 V2.2.3<br>ETSI EN 301 489-3 V2.3.1 |
| Output power: | 144~576W | | |
| Outout Type: | Constant voltage output | Safety Standard (LVD): | EN 61347-1: 2015+A1:2021<br>EN 61347-2-11:2001+A1: 2019 |
| RF: | 2.4GHz | | |
| Control Distance: | 30m | Radio equipment (RED): | ETSI EN 300 400 V2.2.1 |
| IP Rate: | IP20 | Certification: | CE、EMC、LVD、RED |
| Working Temperature: | -10~40°C | Warranty: | 5 Year |

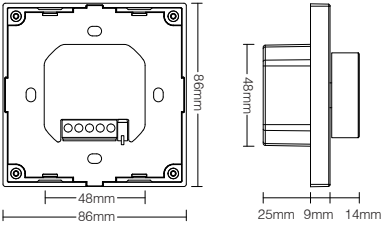


# Indication




## Link/Unlink


### Link




turn off light 10 seconds and turn on again





short press “ON” 3 times within 3 seconds





link is done once light flashes 3 times slowlyyy

Link is failed if light doesn’t flash, please repeat above steps
(Attention: can not link again if remote already finished linking)


### Unlink:




turn off light 10 seconds and turn on again




short press “ON” 5 times within 3 seconds




link is done once light flashes 10 times quickly

Unlink is faild if light doesn’t flash, please repeat above steps
(Attention: no need to unlink if the light never be linked)

## Compatible Remote ( purchase separately)


FUT094


FUT006


FUT007


FUT087/ FUT087-B


B1/ B1-B/ T1


B2/ T2


K1/ K1-B


K2/ K2-B



K3



C1


C3


Y2

## Connection Diagram




## Attention

1.Please ensure that voltage, N and L are correct connection, it will damage the light with wrong wiring

2.Please turn off mains before wiring cable and ensure that connection don't have any problem like short circuit

3.Don't disassemble it if you are not expert

4.Don't use it near magnetic or metal area, it will affect signal and reduce distance.

Made in China