DARKMATTERS

102.303 DarkMatters Easy Controller

Thank you for purchasing the 102.303 DarkMatters Easy Controller, please read the instructions below to get the best out of your new product.

This simple to operate handset from our DarkMatters range of media wall lighting products enables you to switch & dim your media wall lighting wirelessly from up to 30m away.

The handset requires 1x CR2032 Button Battery (not supplied).

Note: line of sight is not required, however walls and other barriers may reduce this range.




Features

- Easy Pairing
- Power On / Off
- Touch Slider for Instant Smooth Dimming
- Handset Wall Mounting Bracket Included

NEED AN EXTRA HAND?
Scan the QR code on the left and watch our instructional video all about to pair your remote with the controller

Operation

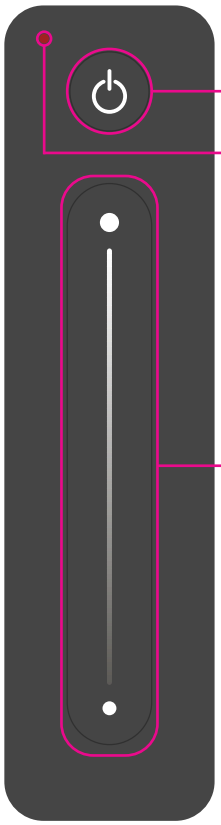

ON / OFF BUTTON
Press the "On / Off" button to switch the Media Wall on and off.

SLIDER CONTROL
The touch sensitive slider control enables smooth accurate dimming of your media wall, simply run your finger up and down the slider to choose the level of light you require.

DARKMATTERS


102.303 DarkMatters Easy Controller

How to Pair your Handset with the DarkMatters Media Wall Dimmer Controller (102.283)



Please ensure the controller is connected correctly and powered on. To pair the handset to the wired controller, there are two methods (see note below):


PAIRING

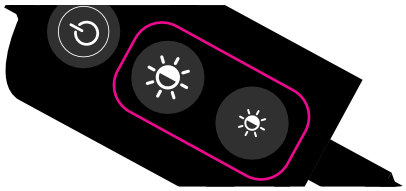

On the wired controller (102.283), press and hold down the Brightness “up & down” buttons together for 2 seconds, the connected lights will flash twice.




Immediately press the “On / Off” button on the handset twice in succession.




The connected lights will flash 3 times to indicate successful pairing.

UN-PAIRING

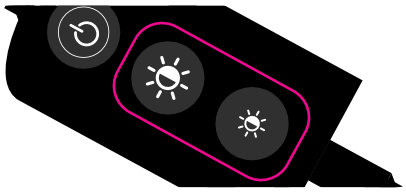

On the wired controller (102.283), press and hold down the Brightness “up & down” buttons together for 5 seconds.

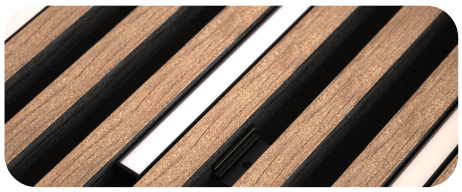

The connected lights will flash 5 times. This will delete all paired remote controllers.


NEED AN EXTRA HAND?
Scan the QR code above and watch our instructional video all about to pair your remote with the controller

POWER RE-START METHOD


PAIRING



Turn off at the wall and on the wired controller (102.283) twice in succession (see note below).



Immediately press the “On / Off” key 3 times in succession on the handset.




The LED Indicator will flash three times to indicate successful pairing.


UN-PAIRING



Power off and on the wired controller (102.283) 5 times in succession (see note below).



Immediately press the “On / Off” key on the wired controller 5 times in succession.



The LED Indicator will flash 5 times to indicate successful unpairing.

Note: When pairing or un-pairing a handset, it is important to wait for 30 seconds between each “Pair / Un-Pair” operation. For the Power Re-Start method, make sure you wait for the connected lights to illuminate before powering off and on again. **Timing for this method is crucial.**