3-Zone standing remote (RGB+CCT)

Model No.:Y3


Feature




- Soft and matte touch glass, scratch-resistant
- 2.4Ghz wireless transmitting technology
- Y3 is vertical remote for RGB+CCT controller
- 2.4Ghz wireless transmitting technology
- Support Miboxer/Milight 2.4G controller series
- Control Distance:30m
- Save scene (max 3 scene)
- Working with multi devices at the same time
- Standing designing with no-slip holder
- Soft and matte touch glass

Product Parameter


Product Name:	3-Zone standing remote (RGB+CCT)
Model No.:	Y3
Working voltage:	3V(AAA*2PCS)
Standby consumption:	15μA
Transmitting:	6dBm
Protocol:	2.4GHz RF
Modulation:	GFSK
Control Distance:	30M
Working temperature:	-10~40°C
EMC standard(EMC):	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-3 V2.3.2
Security standard(LVD):	EN 61347-2-11：2001+A1: 2019 EN 61347-1: 2015+A1:2021 EN 62493:2015+A1:2022
Radio equipment(RED):	ETSI EN 300 400 V2.2.1
Certification:	CE、EMC、LVD、RED



Battery Installation




1. Loosen the screws and open the battery cover.



2. After installing the battery, cover it with the battery cover and tighten the screws.

Button Instruction

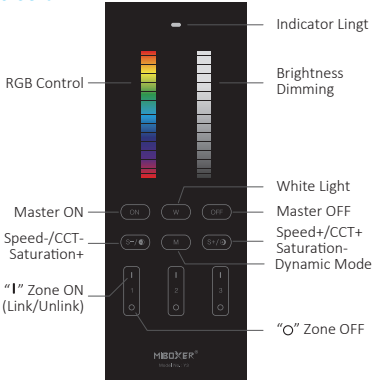

Button Instruction

White: W

For white color

Multi function: S+/

Speed+/CCT+/Saturation-

Multi function: S-/

Speed-/CCT-/Saturation+

Dynamic mode: M

Change mode continuously

RGB slider:

Dim rgb color

Brightness slider:

Dim brightness

Zone ON/OFF (Link/Unlink):


Three zones

"I" Zone ON (Link/Unlink), "O" Zone OFF


Link/Unlink instruction

Link


Attention:remote must link with lighting fixtures before using it



Turn off and turn on lights after 10 seconds




short press "1" 3 times within 3 seconds




Link is done once light flashes 3 times slowly

Please repeat above steps if the light doesn't flash
(Attention: no need to link if the light already linked)


Unlink instruction



Turn off and turn on lights after 10 seconds



Short press " I " 5 times within 3 seconds



Unlink is done once light flashes 10 times quickly

Please repeat above steps if light doesn't flash
(Attention :no need to unlink if the light not linked)

功能说明

Dim RGB color



Up and down to get different colors

Dim brightness



Up and down to dim brightness

Multi function:

Speed-/CCT-/Saturation+

S−/

Dynamic mode, speed down
White mode, color temperature down
RGB mode, saturation up

Multi function:

Speed+/CCT+/Saturation-

S+/

Dynamic mode, speed up
White mode, color temperature up
RGB mode, saturation down

Attention

1.It's remote for Miboxer/Milight 2.4G controller series, please check compatibility in instruction.

2.Don't use it in humidity or high temperature area, please remove battery if you don't use remote frequently and save remote in dry area without static electricity.

3.Don't use it in metal or megnetic area, it will affect transimitting signal and reduce distance.