MiBOXER® | Mi·Light Subordinate New Brand

C8 8-Zone RGB+CCT Remote

LED Technologies
Creative LED & Effect Technology for the Trade Professional

Model No.:C8

Product Feature




- 2.4G RF wireless transmission technology
- 8-Zone Area countless bulbs for each zone
- MiBoxer/Mi-Light 2.4G series products
- 16 Millions of colors to choose
- RGB, Brightness, color temperature and Saturation adjustable
- Working with multi controllers (control distance 30m)
- Magnetic holder with simple installation

Product Parameter


Product Name:	C8 8-Zone RGB+CCT Remote
Model No.:	C8
Working voltage:	3V(AAA*2PCS)
Standby consumption:	15μA
Transmitting:	6dBm
Protocol:	2.4GHz RF
Modulation:	GFSK
Control Distance:	30M

Working temperature:	-10~40°C
EMC standard:	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-3 V2.3.2
Security standard:	EN 61347-2-11：2001+A1: 2019 EN 61347-1: 2015+A1:2021 EN 62493:2015+A1:2022
Radio equipment:	ETSI EN 300 400 V2.2.1
Certification:	CE、EMC、LVD、RED


Remote



Holder



Indication

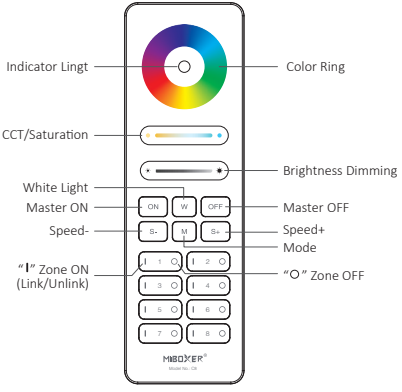

Color Ring: adjust RGB color

White light,: Adjust color temperature
RGB: Adjust saturation

Adjust brightness

ON All ON

OFF All OFF

W White light button

1 ··· 8 Zone control（Link/Unlink）


M Switch to dynamic mode

S+ Dynamic Mode Speed+


S- Dynamic Mode Speed-

Link/Unlink


Link controller must link with remote before using it



Turn off light 10 seconds and turn on again




Short press “ON” 3 times within 3 seconds




Link is done once light flashes 3 times slowly

Link is failed if light doesn’t flash, please repeat above steps
（Attention: can not link again if remote already finished linking）


Unlink:



Turn off light 10 seconds and turn on again



Short press “ON” 5 times within 3 seconds




Link is done once light flashes 10 times quickly

Unlink is faild if light doesn’t flash, please repeat above steps
（Attention: no need to unlink if the light never be linked）


Grouping of several lights

You can add an endless numbers of lights to a zone on the 8 channel remote by linking the lights to different zones. This way you are completely flexible in creating different group combinations. Below you can see some grouping examples.

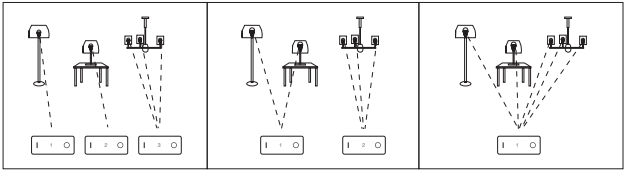


Remark:
Please check the battery installation and controller (totally discharge the power), when you programme after switching off and switching on.

Installation



Remove the sticker on the holder



Stick the holder on the wall and put remote into it

Attention:

1. Only compatible with Miboxer led controller
2. Don’ t use it in humidity or high temperature area, please take out battery if don’ t use it frequently and keep it in dry or static electricity area
3. Don’ t use it near metal or strong magnetic area, it will affect signal and lost distance.

Made in China