
LED Technologies
Creative LED & Effect Technology for the Trade Professional

StudioFlex MW RGB LED Strip 24V 72W IP67

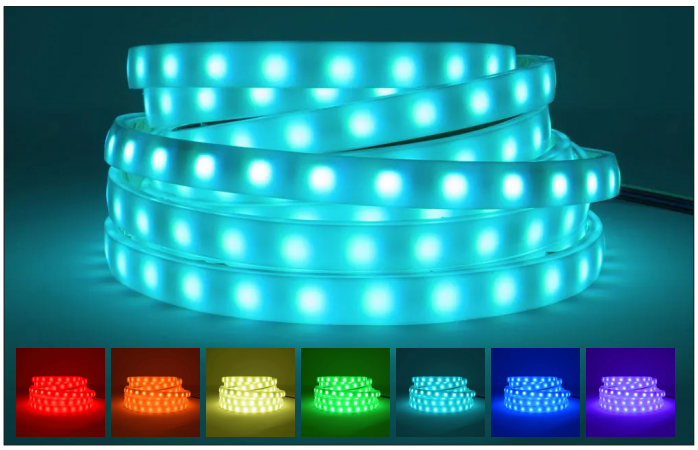

Product Code:	100.920
Product Type:	StudioFlex LED Strip
Guarantee Period:	5 Years


Features & Benefits:

- Milky White Coated LED Strip Light
- Must be used as a full 5m roll
- 60 x 5050 LED's Per Metre
- 900lm / 14.4 Watts Per Metre
- Built with high quality materials
- 5 Year warranty
- 5 Metre Roll
- Professional grade lighting solution

600g *appx* **1oz** *PCB Weight* 24V

Colour:	RGB
Power	72W
Current:	600mA/M
Input Voltage:	24V DC
Cut Intervals:	100mm
LED Quantity:	60 LEDs per Metre
LED Spacing:	16.7mm
LED Type:	SMD5050
Size:	12x4.8x5000mm Roll
CRI Rating:	N/A
Dimmable:	Yes
Lumens per LED:	8-10lm per LED
Lumens per Metre:	280lm /m
Light intensity per LED:	2400-3000mcd
Power Consumption per Metre:	14.4W
IP Rating:	IP67 milky
Average LED Lifetime:	50,000 Hours
Reel Length:	5m
Peelable Back:	300LSE 3M adhesive tape
CE & RoHS:	Yes
Continuous Run:	5 metres
Base Type:	60cm tails on each end

Dimensions (Unit: mm)

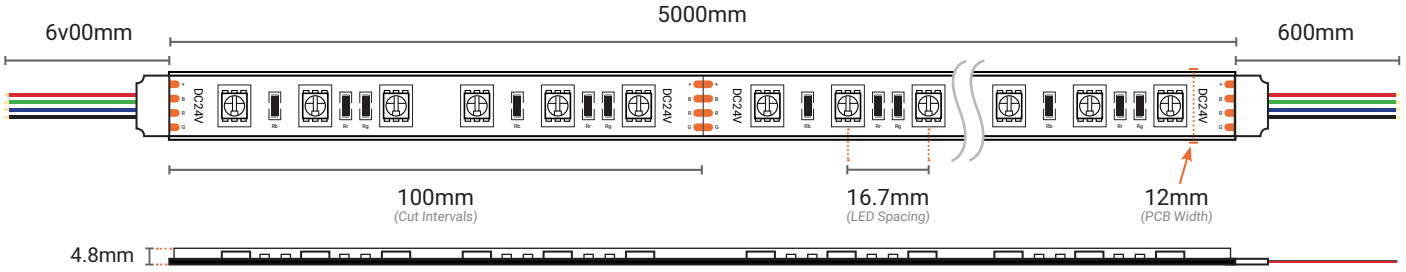

Notes:

- The LED Strip cutting points are situated 50mm apart from each other. The cutting marks are located on the four copper tabs every 50mm. The LED Strip must **NOT** be cut anywhere else.
- This StudioFlex RGB LED Strip features 60 LEDs per metre, perfect for professional applications

UK CA | CE | RoHS Compliant

We reserve the right to change specifications without notice. E&OE


If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.


Telephone: 01260 540014
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
www.ledtechnologies.co.uk

LED Technologies
Creative LED & Effect Technology for the Trade Professional

StudioFlex MW RGB LED Strip 24V 72W IP67

100.920 Connection Diagram

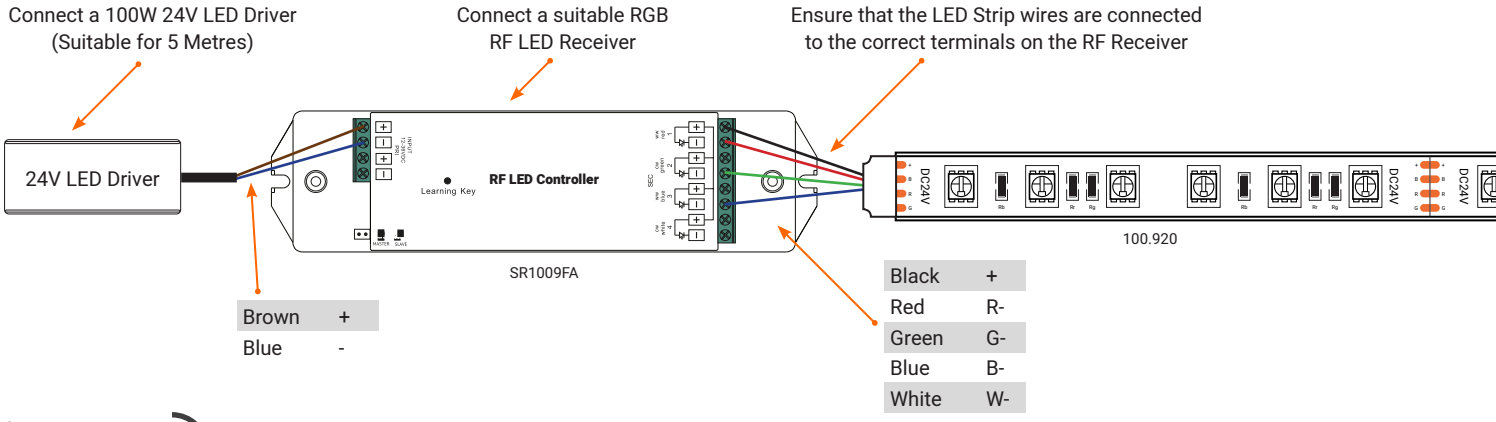



Sunricher RGBW RF Controller

SR2819SP

Example of RF Control Method

Notes:

- The StudioFlex Strip is powered by 72W, so we recommend a **100W LED Driver** to safely power **5 Metres** of the strip.
- Ensure that the LED Strip wires are connected to the correct terminals on the suitable LED Receiver chosen. Please see the diagram above for the correct terminals to attach each wire to.
- **Our range of LED Strip is not limited to RF Control Methods. Many other control options are available for the LED Strip including DMX, DALI ZiGBEE & more.*

+10% Tolerance on all Specifications. Colours can be variable.
We reserve the right to change specifications without notice. E&OE

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Telephone: 01260 540014
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
www.ledtechnologies.co.uk