LED Technologies
Creative LED & Effect Technology for the Trade Professional

Studio Flex

StudioFlex RGBWW LED Strip (2400-2600K) 24V 150W IP20



Product Code:	100.553
Product Type:	StudioFlex LED Strip
Guarantee Period:	5 Years

Features & Benefits:

- RGB WW (2400-2600k) LED Strip Light
- 12mm Wide PCB
- 96 x Quad Colour LED's Per Metre
- 1400lm / 30W Per Metre
- Built with high quality materials
- 5 Year warranty
- 5 Metre Roll
- Professional grade lighting solution


150g *appx*

2oz *PCB Weight*

24V

Colour:	RGBWW (RGB+2400-2600K)
Power	150W
Current:	1250mA/M
Input Voltage:	24V DC
Cut Intervals:	100mm
LED Quantity:	96 LEDs per Metre
LED Spacing:	10.4mm
LED Type:	SMD5050 4 chips in 1 LED
Size:	12x1.9x5000mm Roll
CRI Rating:	WW color >80
Dimmable:	Yes
Lumens per LED:	15lm per LED
Lumens per Metre:	1400m /m
Light intensity per LED:	4500mcd
Power Consumption per Metre:	30W
IP Rating:	IP20
Average LED Lifetime:	50,000 Hours
Reel Length:	5m
Peelable Back:	300LSE 3M adhesive tape
CE & RoHS:	Yes
Continuous Run:	5 metres
Base Type:	20cm tails on each end

Dimensions (Unit: mm)

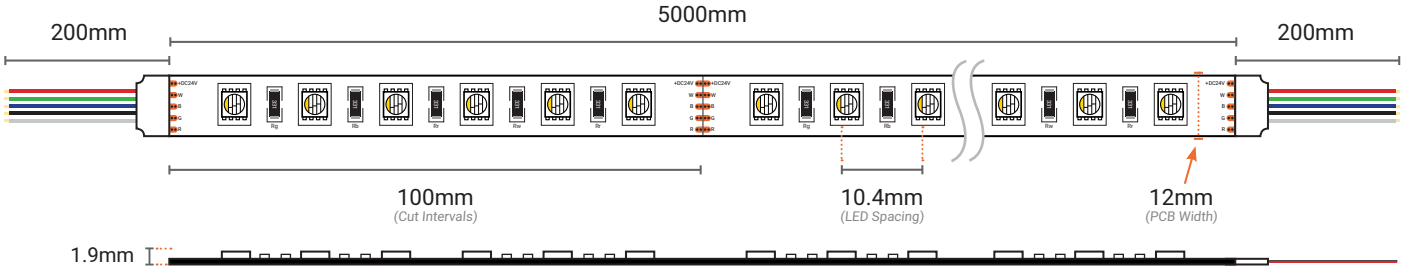

Notes:

- The LED Strip cutting points are situated 100mm apart from each other. The cutting marks are located on the five copper tabs every 100mm . The LED Strip must **NOT** be cut anywhere else.
- This StudioFlex RGB LED Strip features 60 LEDs per metre, perfect for professional applications

UK CA | CE | RoHS Compliant

We reserve the right to change specifications without notice. E&OE

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.


Telephone: 01260 540014
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
www.ledtechnologies.co.uk

LED Technologies
Creative LED & Effect Technology for the Trade Professional

Studio Flex

StudioFlex RGBWW LED Strip (2400-2600K) 24V 150W IP20

100.553 Connection Diagram

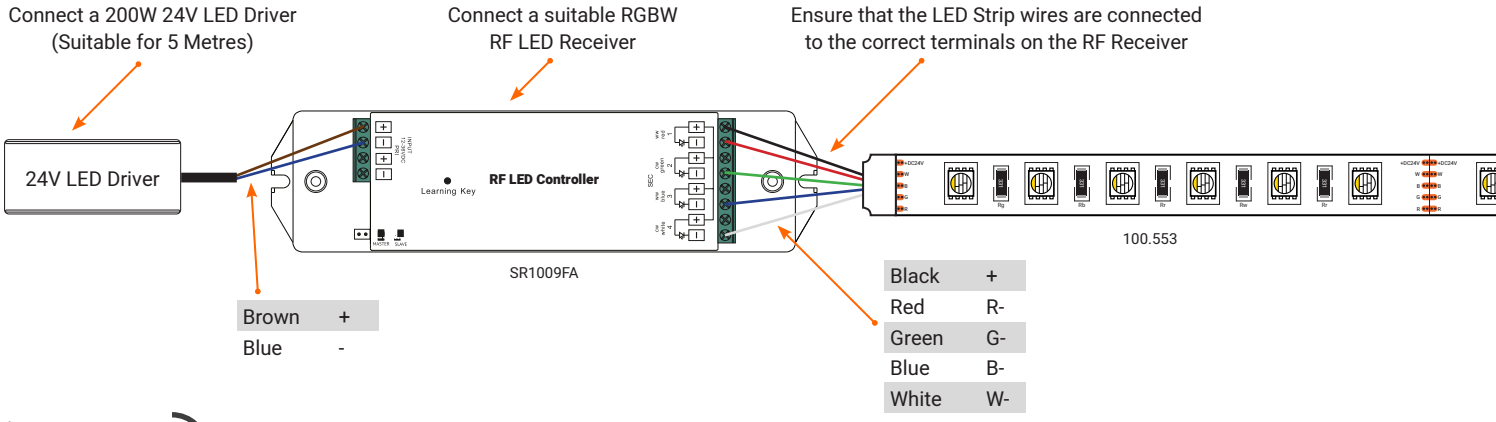



Sunricher RGBW RF Controller

SR2819SP

Example of RF Control Method

RF WiFi DMX DALI 0-10V zigbee Z-WAVE

Notes:

- The StudioFlex Strip is powered by 150W, so we recommend a **200W LED Driver** to safely power **5 Metres** of the strip.
- Ensure that the LED Strip wires are connected to the correct terminals on the suitable LED Receiver chosen. Please see the diagram above for the correct terminals to attach each wire to.
- **Our range of LED Strip is not limited to RF Control Methods. Many other control options are available for the LED Strip including DMX, DALI ZiGBEE & more.*

+10% Tolerance on all Specifications. Colours can be variable.
We reserve the right to change specifications without notice. E&OE

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Telephone: 01260 540014
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
www.ledtechnologies.co.uk

UK CA CE RoHS Compliant