LED Technologies
Creative LED & Effect Technology for the Trade Professional

Pro Flex

ProFlex Warm White LED Strip 2500-2900K 10mtr 36V 72W IP67



Product Code:	100.743
Product Type:	Proflex
Guarantee Period:	3 Years

Features & Benefits:


- Warm White (2500-2900k) LED Strip
- High Adhesive Tesa tape on Back
- 90 x 3528 LED's Per Metre
- 7.2W Per Metre
- Built with high quality materials
- 3 Year warranty
- 10 Metre Roll
- Daisy chain 30m in one line

1100g/roll *appx*

3oz *PCB Weight*

Colour:	2500-2900K
Power	72W
Current:	200mA/M
Input Voltage:	36V DC
Cut Intervals:	100mm
LED Quantity:	90 LEDs per Metre
LED Spacing:	11.1mm
LED Type:	SMD2835
Size:	14x4.8x10,000mm Roll
CRI Rating:	>80
Dimmable:	Yes
Lumens per LED:	8lm per LED
Lumens per Metre:	650-700lm /m
Light intensity per LED:	2500mcd
Power Consumption per Metre:	7.2W
IP Rating:	IP67
Average LED Lifetime:	50,000 Hours
Reel Length:	10m
Peelable Back:	300LSE 3M adhesive tape
CE & RoHS:	Yes
Continuous Run:	30 metres
Base Type:	100cm tails and 30cm cable+DC connector

Dimensions (Unit: mm)

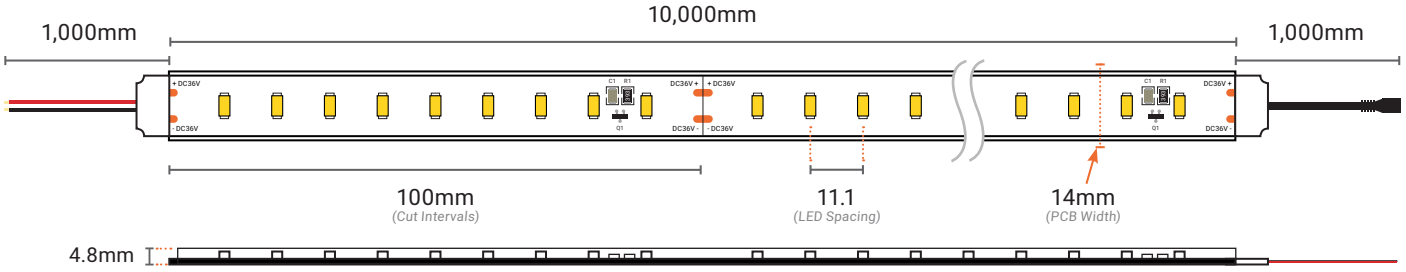

Notes:

- The LED Strip cutting points are situated 11.1mm apart from each other. The cutting marks are located on the two copper tabs every 11.1mm. The LED Strip must **NOT** be cut anywhere else.
- This ProFlex LED Strip features 60 LEDs per metre, perfect for professional applications

UK CA | CE | RoHS Compliant

We reserve the right to change specifications without notice. E&OE

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Telephone: 01260 540014
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
www.ledtechnologies.co.uk


LED Technologies
Creative LED & Effect Technology for the Trade Professional


Pro Flex

ProFlex Warm White LED Strip 2500-2900K 10mtr 36V 72W IP67

100.743 Connection Diagram

RF Dimming Control Example

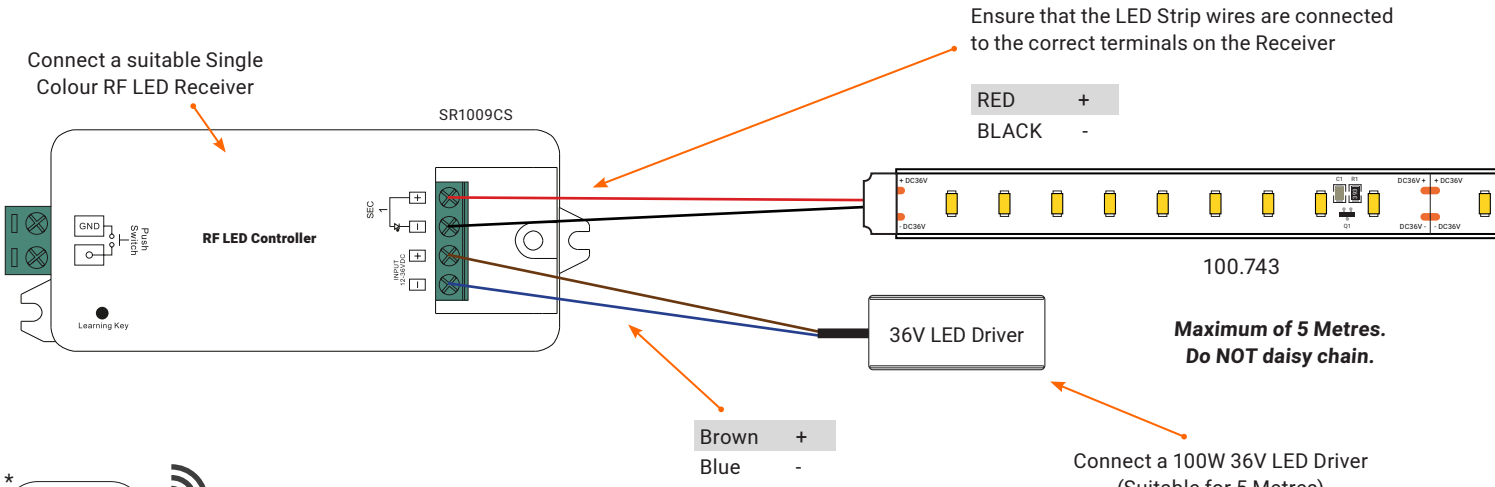



Sunricher Single Colour RF Controller

SR2819SDIM

Example of RF Control Method

RF WiFi DMX DALI 0-10V zigbee Z-WAVE

Notes:

- The ProFlex Strip is powered by 72W, so we recommend a **100W LED Driver** to safely power **5 Metres** of the strip.
- Ensure that the LED Strip wires are connected to the correct terminals on the suitable LED Receiver chosen. Please see the diagram above for the correct terminals to attach each wire to.
- **Our range of LED Strip is not limited to RF Control Methods. Many other control options are available for the LED Strip including DMX, DALI ZiGBEE & more.*

+10% Tolerance on all Specifications. Colours can be variable.
We reserve the right to change specifications without notice. E&OE

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Telephone: 01260 540014
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
www.ledtechnologies.co.uk

UK CA CE RoHS Compliant