
# AC Phase Cut RF + Push Switch

09.09SAPS.04734

***Important:*** *Read All Instructions Prior to Installation*

## Function introduction

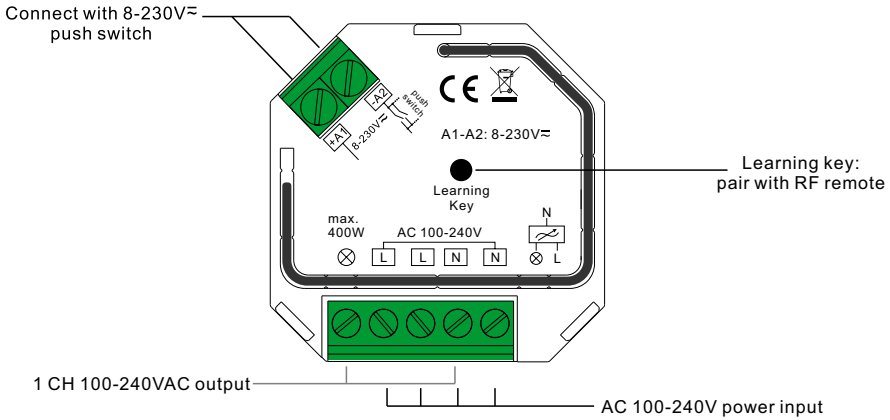


## Product Data

| Input Voltage | Output Voltage | Output Power | Size(LxWxH) |
|---|---|---|---|
| 100-240VAC | 100-240VAC | 1x400W max | 45.5x45x20.3mm |

- Radio Frequency : 868/869.5/916.5/434mhz
- Waterproof grade: IP20

- 100-240VAC Wide Input and Output Voltage
- 1 Channel Output, Up to 400W
- Input and Output with Screw Terminals, Safe and Reliable
- Great Compatibility with Universal 8V-230V~ Input Push Switches
- Great compatibility with a variety of Perfect RF series single color remote controls
- To switch single color LED lamps
- Mini Size, Easy to be Installed into a standard 86*86mm wall box

## Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.


## Pair/delete the pairing with RF remote

1.Do wiring according to connection diagram.
2.Pair RF Receiver with RF remote: please refer to the instruction of the remote that you would like to pair with.
3.Delete the pairing:
(1)Wire up the RF receiver correctly, power on.
(2)Press and hold down the **" Learning Key"** button on receiver for over 3 seconds until the LED indicator flashes, which means well deleted.


**PUSH Switch:**
When connected to Push Switch, click push switch to turn ON/OFF light.

## Wiring diagram

(1)With AC push dimmer

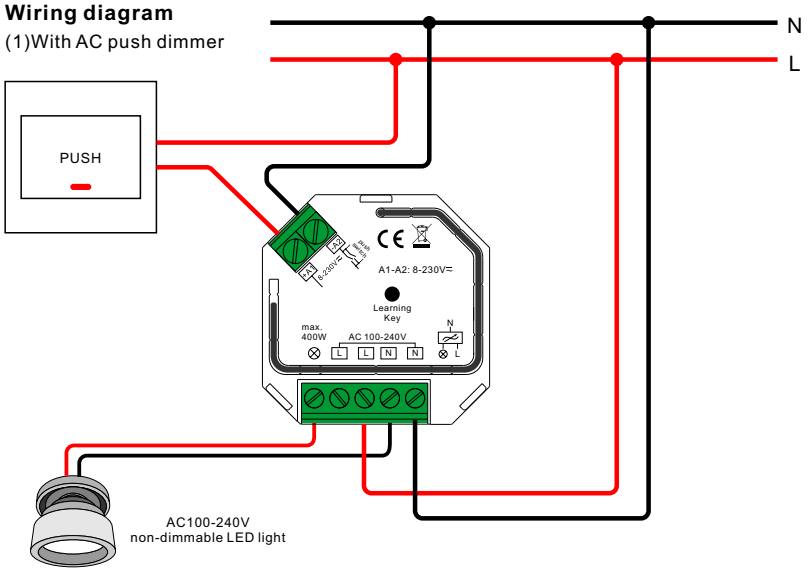


(2)With Push LV

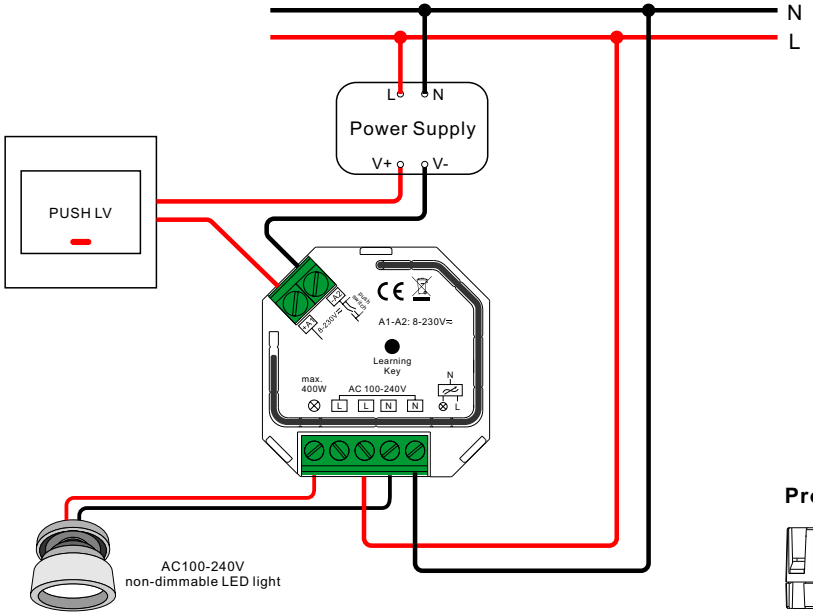


## Product Dimension

