

## ProFlex Warm White 2200-2400K 48W 24V 120 L/pmtr



Product Code:	101.919
Product Type:	ProFlex LED Strip
Guarantee Period:	3 Years

### Features & Benefits:


- Warm White (2200-2400K) LED Strip
- 10mm PCB Width
- 120 x 3528 LED's Per Metre
- 9.6W Per Metre
- Built with high quality materials
- 3 Year warranty
- 5 Metre Roll
- 50mm Cut Intervals

 **130g appx**  **2oz PCB Weight**

**24V**

Colour:	Warm White
Colour Temperature:	2200K - 2400K
Power:	48W
Current:	400mA/M
Input Voltage:	24V DC
LED Spacing:	8.3mm
Cut Intervals:	50mm
LED Quantity:	120 LEDs per Metre
LED Type:	SMD3528
Beam Angle:	120°
CRI Rating:	>95
Lumens per LED:	5-6LM per LED
Lumens per Metre:	642LM per Metre
Light Intensity per LED:	1500-1800mcd
Power Consumption per Metre:	9.6W
IP Rating:	IP20
Average LED lifetime:	50,000 Hours
Reel Size:	10 x 2.5 x 5000 (mm)
Base Type:	30cm Tail + DC Connector
CE & RoHS:	Yes
Continuous Run:	5 Metres
Peelable Back:	300LSE 3M Adhesive Tape

### Dimensions (Unit: mm)

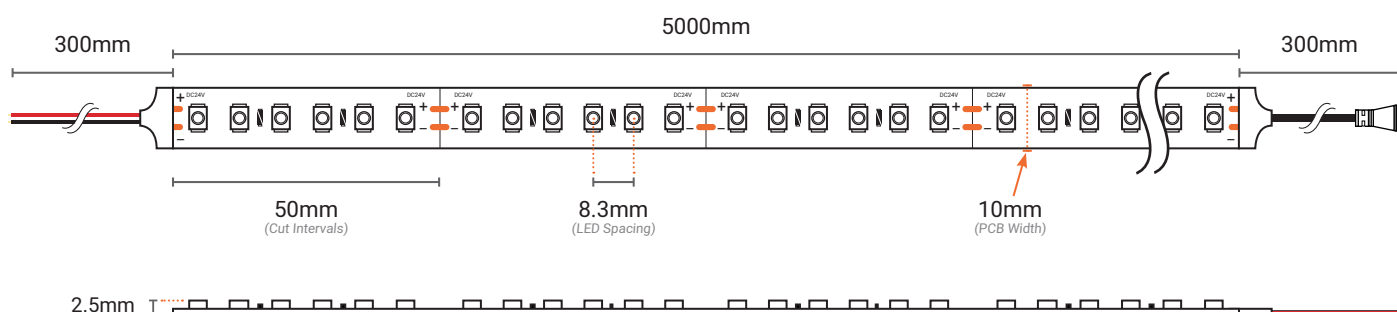

### Notes:

- The LED Strip cutting points are situated 50mm apart from each other. The cutting marks are located over the line with the two copper tabs and scissor icons. The LED Strip must **NOT** be cut anywhere else.
- This ProFlex LED Strip features very closely situated LED chips, spaced 8.3mm apart from each other. These tightly spaced LEDs create an intensely bright light output.




**We reserve the right to change specifications without notice. E&OE**

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Telephone: **01260 540014**  
Opening times: Mon-Thur: 8:30am - 5:00pm  
Fri: 8:30am - 4:30pm  
[www.ledtechnologies.co.uk](http://www.ledtechnologies.co.uk)

## ProFlex Warm White 2200-2400K 48W 24V 120 L/pmtr

### 101.919 Connection Diagram

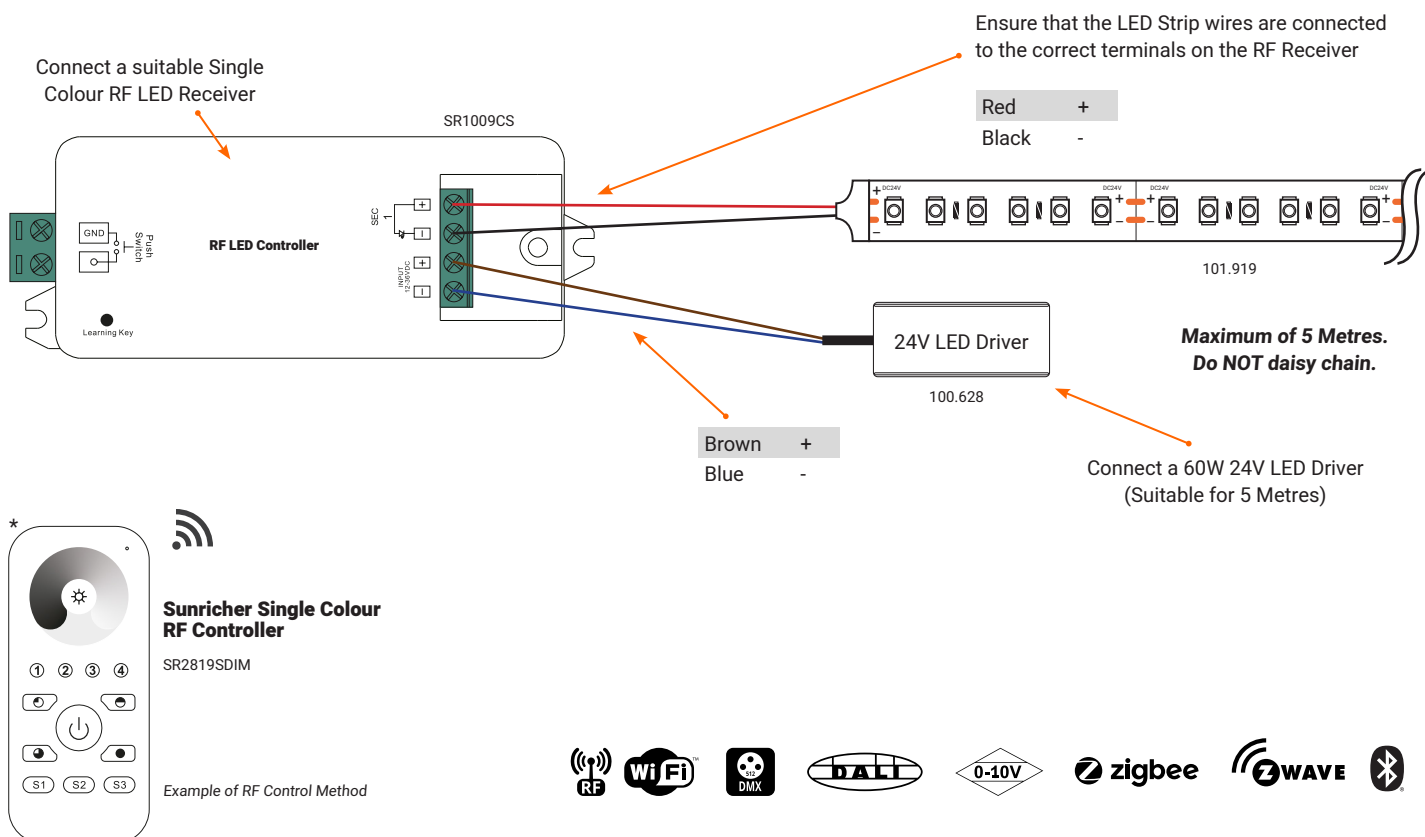

#### Notes:

- The ProFlex LED Strip is powered by 48W, so we recommend a **60W LED Driver** (100.628) to safely power **5 Metres** of the strip.
- Ensure that the LED Strip wires are connected to the correct terminals on the suitable LED Receiver chosen. Please see the diagram above for the correct terminals to attach each wire to.
- \*Our range of LED Strip is not limited to RF Control Methods. Many other control options are available for the LED ProFlex Strip including DMX, DALI ZIGBEE & more.

**+10% Tolerance on all Specifications. Colours can be variable.**  
**We reserve the right to change specifications without notice. E&OE**

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Telephone: **01260 540014**  
Opening times: Mon-Thur: 8:30am - 5:00pm  
Fri: 8:30am - 4:30pm  
[www.ledtechnologies.co.uk](http://www.ledtechnologies.co.uk)

