

## 18W RGB+CCT LED Linear Light

Model No.: LL1-18

### Features

The case is made of PC material. Lampshade and lamp body are integrally formed, with anti-fire, waterproof, dustproof, anti-corrosive and anti-UV function. The appearance is simple and stylish.



RGB colors to choose



2.4GHz RF Remote control  
Control distance 30m



Color temperature  
2700K~6500K



Smartphone APP control  
(2.4GHz gateway is needed)



Dim brightness/  
Saturation



Support third party voice control  
(2.4GHz gateway is needed)



Waterproof and  
dustproof grade IP66



Signal transmitting &  
Modes synchronization



Beam angle 140°

### Parameters

Model No.: LL1-18

Input Voltage: AC100~240V 50/60Hz

Color Temp.: 2700K~6500K

Luminous Flux: 1900LM

Luminous Efficiency: 105LM/W

CRI: >80

Working Temp.: -20~45°C



Beam Angle: 140°

RF: 2.4GHz

Control Distance: 30m

IP Rate: IP66

Made in China

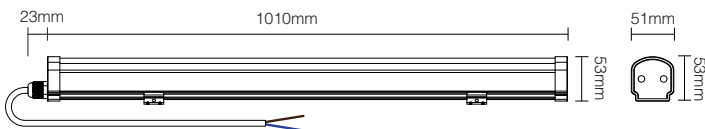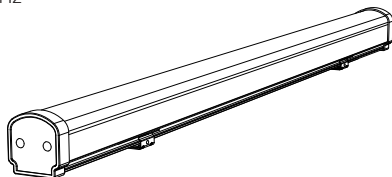

### Signal transmitting

One lighting fixture can transmit the signals from the remote control to another lighting fixture within 30m, as long as there is a lighting fixture within 30m, the remote control distance can be limitless.


### Modes synchronization

Different lighting fixture can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.



Signal transmitting &  
Modes synchronization


Signal transmitting &  
Modes synchronization

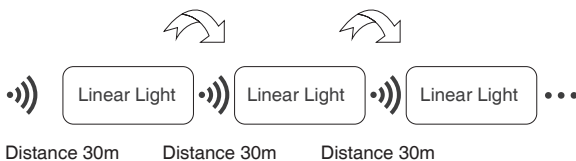

# Dynamic Mode Sheet

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat tuesday	
8	Party	
9	Slow color splash	

## Connection Diagram

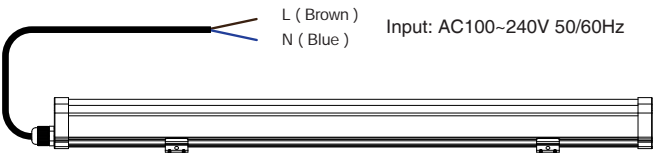

## Link/Unlink

Compatible with these remote controls (Purchased separately)



FUT089



FUT088



FUT092



FUT096




B8



B0



B3 / T3



B4 / T4



WL-Box1



Lighting can be working after linking with remote; for more details, pls read the remote instruction.

## Attention

1. When installation, Please switch off power, and switch on power after assuring the correct wiring.
2. The light is with waterproof and damp-proof design. Waterproof rate is IP66; it can be working normally in the rain, but cannot work under water.
3. The working temperature is -20~45°C, please do not install the light on the area over 45°C to assure the lifespan.



Signal transmitting &  
Modes synchronization

Made in China