



Product Features

- Selectable constant current and constant voltage output.(Custom on request)
- Full-ioslated,delivering up to 40W of power.
- Short circuit,over current and over voltage protection. Up to 80% efficient.
- Fireproof environmental protection PC plastic cover
- 2 years quality warranty



Technical Specifications

Model No.	100.697	
Input Voltage Range	90-130V&180-240V/AC	
AC Frequency	48-62Hz	
Input current	0.52Amax	
Output Mode	Constant Voltage	
Output Current	3000mA	
On Load Voltage	12V	
No Load Voltage	12V	
Output Power	40W Max.	
Power Factor	>0.95	
Efficiency	>80%	
Dime nsio ns	132*47*29(mm)	
Weight	138g	


Environmental Specifications

Operating Temperature	-30~45°C
Storage Temperature	-40~+70°C
Thermal Dissipation	Nature
Relative Humidity	5~95%
Isolation Voltage	In/Out 3750VAC
Vibration	5-55Hz/2g,30 Minutes
Life Time	50000Hours,at TC max

Conformity & Standards

EMI	EN55022 EN55015 Class B
Safety	EN60598
Electromagnetic Immunity	EN61547,ENV5024 EN61000-4-2/3/4/6/8/11
Harmonic Current Emissions	EN61000-3-2 EN61000-3-3

Installation Introduction

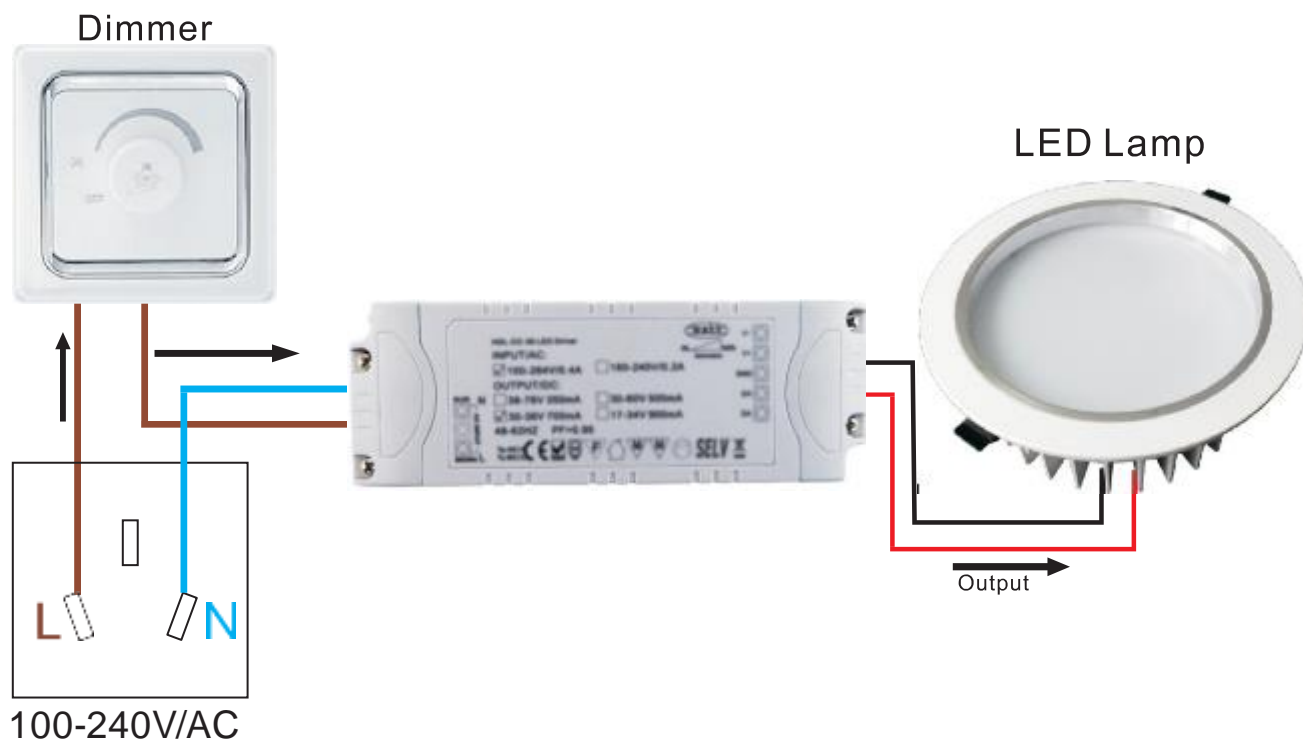

Dimensions Chart

