


Product Code: 102.103

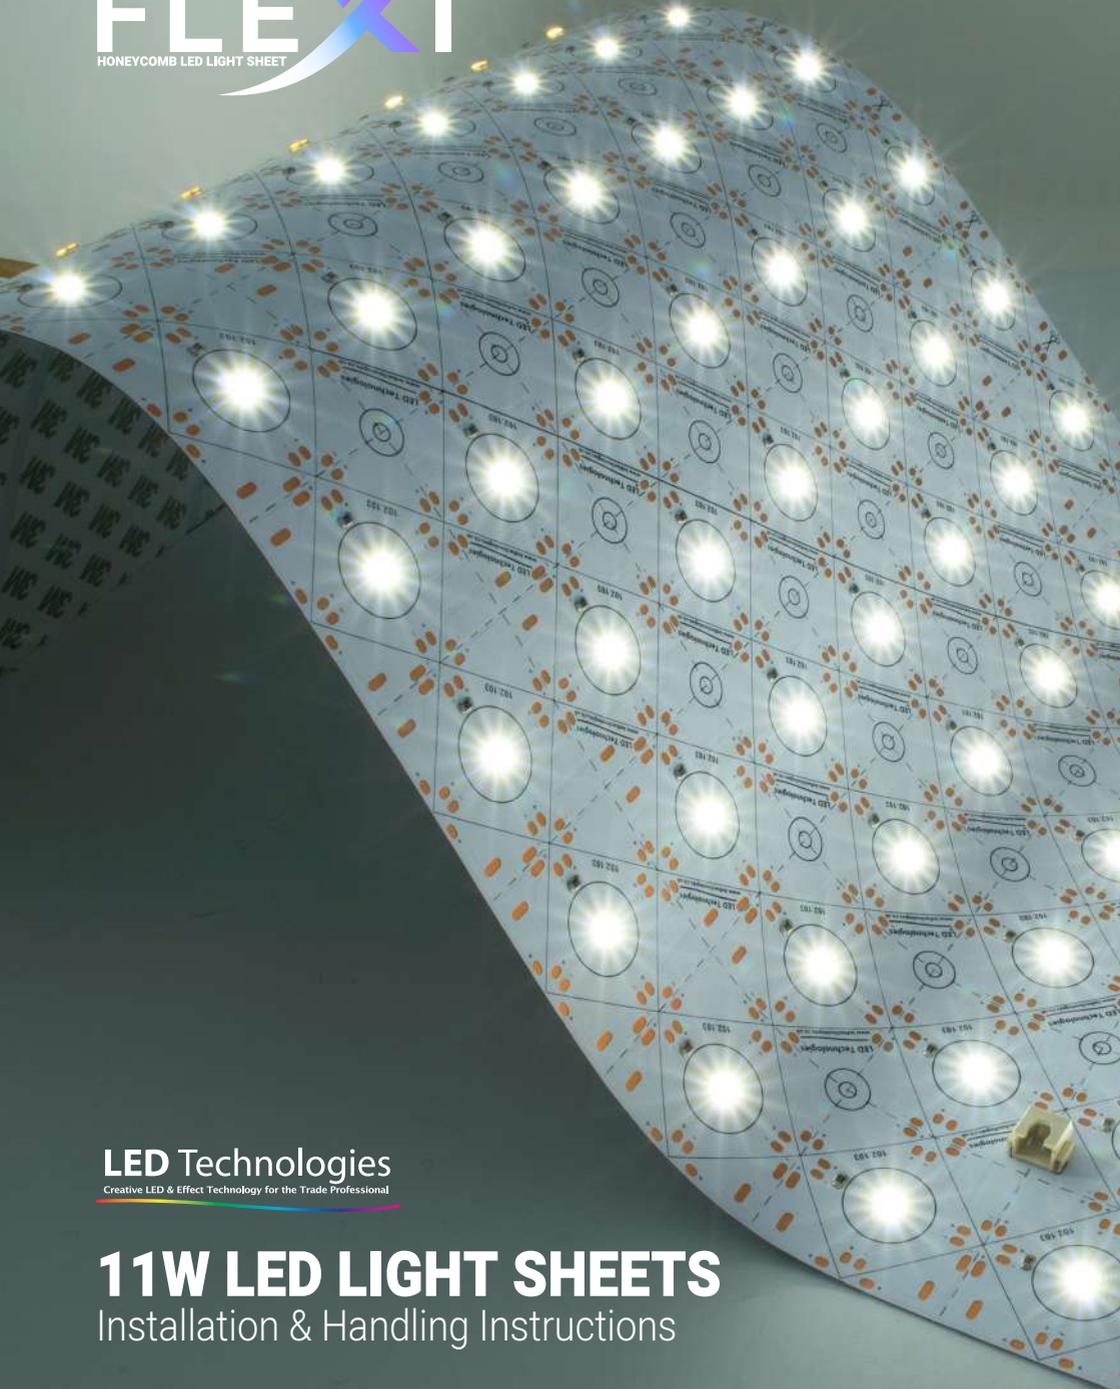

LED Technologies

Creative LED & Effect Technology for the Trade Professional

11W LED LIGHT SHEETS

Installation & Handling Instructions

11W Honeycomb Flexible LED Light Sheet

Installation & Handling Instructions

The 11W Honeycomb Flexible LED Light Sheet from LED Technologies is a highly flexible light panel designed primarily for use in light boxes and signage however, this superb product is equally suitable for many other applications and projects where a bright, flexible lighting solution is required.

The panels are supplied in packs of four units and each panel features 105 x Cool White (6500K) high quality LED's. Panels can be cut, flexed, and linked together as required and then fixed into place with the attached 3M backing.

Whatever the application, to get the best out of your product please read the instructions and recommendations detailed below.

Key Features:


- ✔ Can be cut to size as required
- ✔ Very flexible
- ✔ 120deg beam angle
- ✔ 105 x 2835 LED's at 11W / sheet
- ✔ Light sheet size 503mm x 235mm
- ✔ Linkable up to 9 x units together
- ✔ Supplied in packs of 4 sheets
- ✔ Bright cool white 6000-6500K light
- ✔ Powerful 300LSE 3M™ sticky backing

Preparation

Each panel has a premium 300LSE 3M™ sticky backing, it is important that the surface that the panel is attached to is clean and free from grease and dust to allow the backing to create a strong bond with the surface. If the panel is to be stuck onto a porous surface such as wood, there are additional fixing holes positioned at various points across the panel (see the illustration below). These holes allow you to further secure the panels with a screw.



300LSE 3M™ Peelable Back

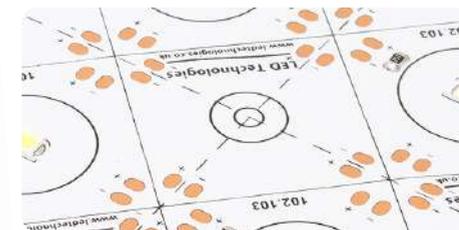


Fixing Holes (Screws)

We recommend using an M3 self-tapping screw with a flat head approximately 7mm in diameter. Please ensure that you use a non-corrosive screw so that moisture does not cause the screw to rust, as this can then spread to the exposed terminals on the Flexi Sheet. Care must also be taken not to damage the panel by over tightening the screw.



It is important to plan ahead, take time to lay the panels over the area that they will be attached to, making a note of any cutting points and connections. Consider the length of the link leads when setting out the panels, it is important that the plugs and sockets make a good connection, the link leads should click firmly into place. Ensure that you make any cuts to the panels before you fix them into place. Mark out the position of the panels with a pencil which will make it easier to align them when sticking into place.

Important: Once the cover for the 3M sticky backing is removed and the panels are fixed into place, damage will occur if you try to remove or reposition the panels, this will invalidate the warranty. We recommend starting at one side and then carefully lower the panel down sticking into place as you go.

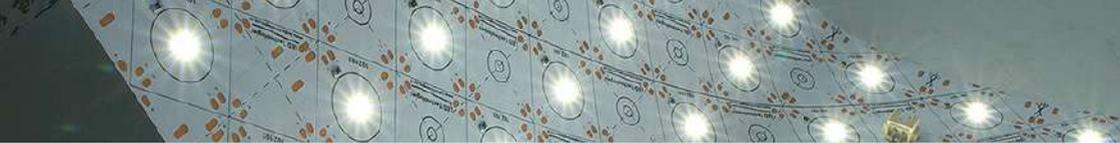


Cutting, Bending & Linking



We recommend a maximum bend of 100mm diameter, the panels can be cut vertically, horizontally, and diagonally only along the marked cutting points. It is also possible to cut out sections from the centre of the panel following the cutting points if required.

See illustration below showing the cutting points and bend diameter.

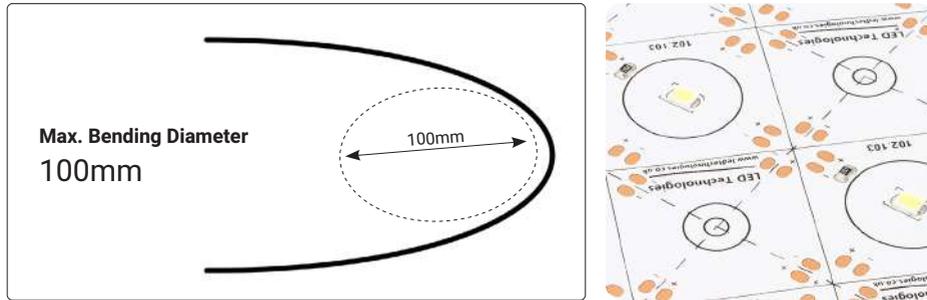

The cutting points can be identified by the thin black lines along the LED Sheet that cross at the copper tabs. The best method of cutting the Flexi Sheet is with large sharp scissors, if you want to cut sections out of the centre of the panel use a sharp "box cutter" type knife or similar product.

Recommended Tools



Sharp Scissors



Sharp Stanley Knife



Strong Ruler

Note: Extreme care must be taken when using sharp knives and scissors to avoid injury. We suggest if using a knife that you lay the Flexi-Sheet onto a flat wooden surface bearing in mind the blade will damage this surface as it cuts through the panel.

Connections & Power Input



Each panel has a number of male connection points that are set back from the edge of the panel. Both power input and link cables may be connected to any of these connecting points. The power input cable is fitted with a female socket with wire tails to the other end to allow you to connect to a suitable 24V LED Driver. The link cables are shorter with a female socket at each end.

Honeycomb Flexi LED Light Sheet Starter
Wire Pack 10pcs for 11W Version
(Product Code: 102.106)

Honeycomb Flexi LED Light Sheet Connector
Pack 10pcs for 11W Version
(Product Code: 102.105)



Note: Up to nine 11W panels can be linked together in any order, these can be powered from a single 24V LED Driver.

Recommended Flexi Sheet Drivers



The panels will require a 24V constant voltage driver. The size of the driver is determined by the number of panels that you are linking together.

Each panel is 11W so if you are linking nine panels together, that would require a total of 99W.

Recommended Flexi Sheet Drivers (Continued)



We recommend over-specifying the driver so that it runs at around 75% of the driver value this will extend the life of the driver.

Recommended Driver #1



LED Tech | 150W 24V LED Driver

Product Code: **100.529**

For 9 x Sheets we would recommend our 24V 150W driver

LED Tech

Recommended Driver #2



LED Tech | 30W 24V LED Driver

Product Code: **100.530**

Up to 2 x Sheets (22W), the closest driver would be our 24V 30W driver

LED Tech


Technical Help & Advice



For any additional technical help and advice on our LED Flexi Sheets and our recommended LED drivers, please call our technical sales team by phone, email, or live chat and what's App on our website.

☎ 01260 540014 ✉ sales@ledtechnologies.co.uk 📞 07552 027456

Product Dimensions

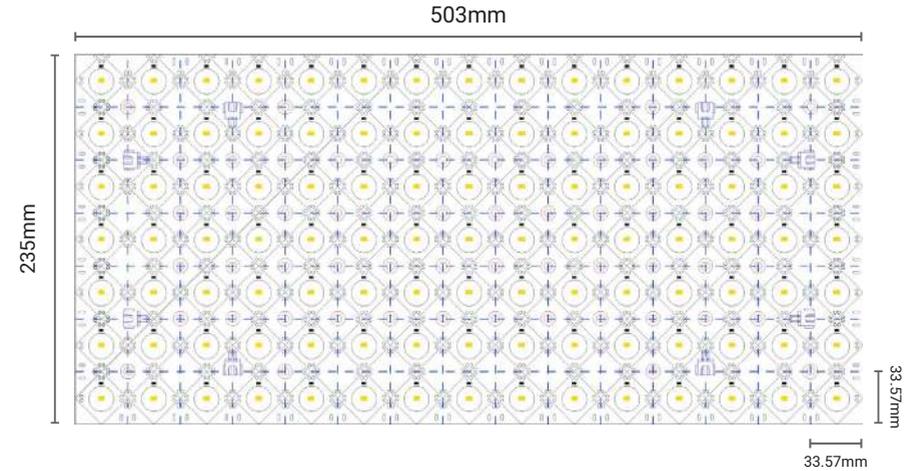

Product Warranty



Flexi LED Light Sheets are for professional installation and set up only. Installation must be adhered to. This manual is provided to guide you on safely installing this product. This must be followed correctly to ensure a long life.

Your warranty is void if we deem the following:


Water ingress due to incorrect assembly – water ingress can happen slowly and failure may take some time, you are not covered under warranty if there is any evidence of water ingress.

LED Failure. Normally a small number of LEDs will fail in the 1st year, and this is not a product fault and will be considered acceptable.

+/-10% Tolerance on all specifications. This manual is by no means exhaustive.

We reserve the right to change specifications without notice. E&OE



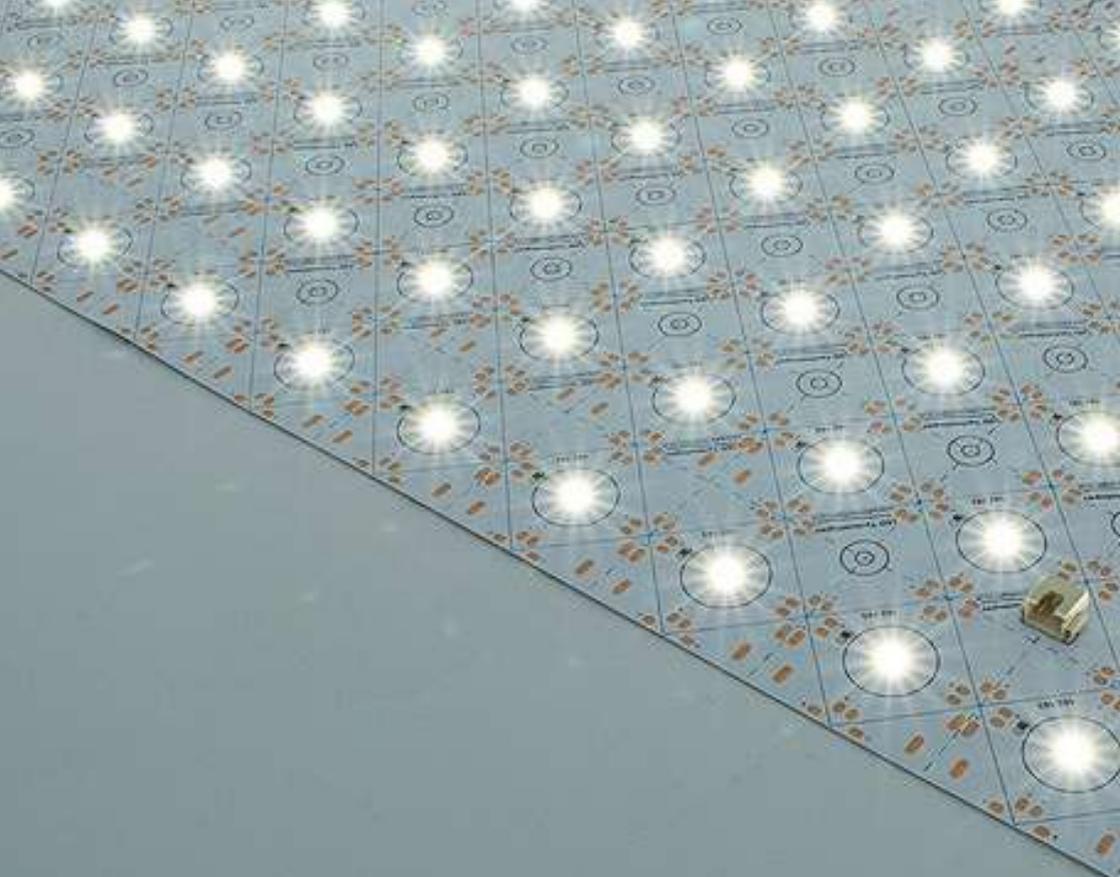

01260 540014

Mon - Thurs: 8:30 to 17:00
Fri: 8:30 to 16:30



Live Chat

Mon - Thurs: 8:30 to 16:45
Fri: 8:30 to 16:15

(E&OE) Specifications may change without notice

www.ledtechnologies.co.uk