


# AC Triac RF Switch



09.09ACS.04004

**Important:** Read All Instructions Prior to Installation

## Function introduction

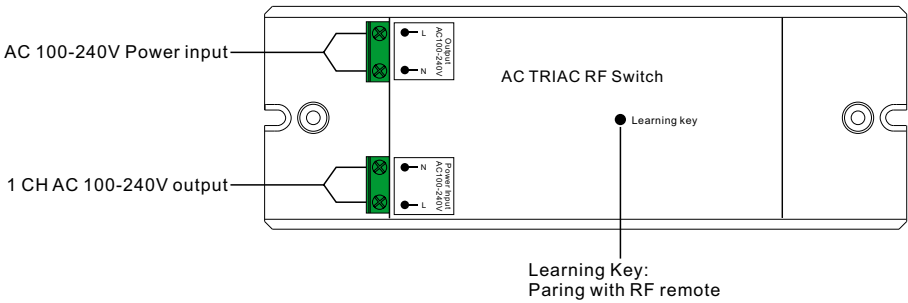

## Product Data


Input Voltage	Output Voltage	Output Current	Output Power	Size(LxWxH)
100-240VAC	1x(100-240)VAC	1x1.2A	1x(120-288)W	170x59x29mm

- Safe and reliable full isolation design
- Great compatibility with a variety of remote controls
- To switch on/off single color LED lamps, traditional incandescent and halogen lights
- Radio Frequency : 868/869.5/916.5/434mhz
- Waterproof grade: IP20

## Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

## Wiring Diagram

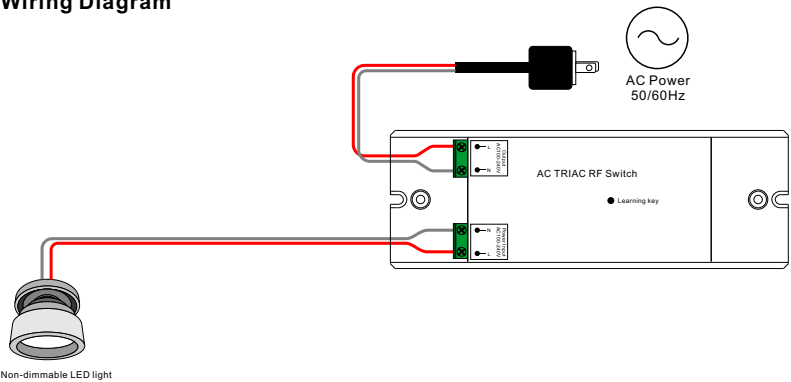

## Pair/delete the pairing with RF remote

- 1.Do wiring according to connection diagram.
- 2.Pair RF Receiver with RF remote: please refer to the instruction of the remote that you would like to pair with.
- 3.Delete the pairing:
  - (1)Wire up the RF receiver correctly, power on.
  - (2)Press and hold down the “ **Learning Key**” button on receiver for over 3 seconds until the LED indicator flashes, which means well deleted.

## Product Dimension

