


50W RF LED Driver(Constant Voltage)

09.100950VT.04028



Important: Read All Instructions Prior to Installation

Function introduction

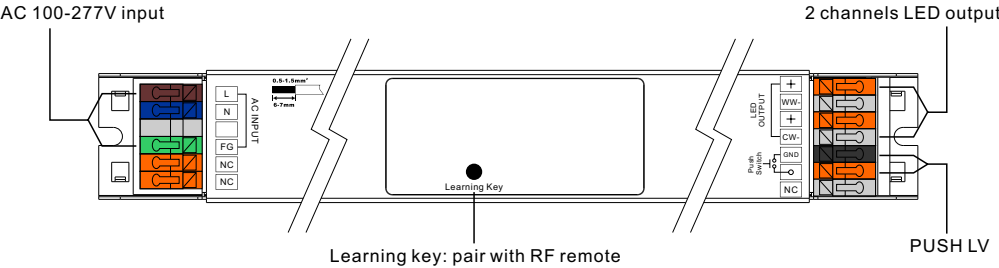

Product Data

Output	LED Channel	2	
	DC Voltage	12V DC	24V DC
	Max. Current	Max. 4.16A/ch, ch1+ch2=4.16A	Max. 2.08A/ch, ch1+ch2=2.08A
	Voltage Tolerance	±1%	
	Rated Power	max. 50W	
Input	Voltage Range	100-277V AC	
	Frequency Range	50/60Hz	
	Power Factor (Typ.)	> 0.98 @ 100VAC, > 0.95 @ 230VAC	
	Total Harmonic Distortion	THD ≤ 15% (@ full load / 230VAC)	
	Efficiency (Typ.)	85% @ 230VAC full load	86% @ 230VAC full load
	AC Current (Typ.)	0.6A @ 100VAC, 0.26A @ 230VAC, 0.23A@277VAC	
	Inrush Current (Typ.)	COLD START 2A at 230VAC	
	Leakage Current	< 0.5mA /230VAC	
Control	Standby Power Consumption	< 0.5W	
	Dimming Interface	RF Wireless/PUSH LV	
	Dimming Range	0%-100%	
	Dimming Method	Pulse Width Modulation	


Protection	Short Circuit	Yes, recovers automatically after fault condition is removed
	Over Current	Yes, recovers automatically after fault condition is removed
	Over Temperature	Yes, recovers automatically after fault condition is removed
Environment	Working Temp.	-25℃ ~ +45℃
	Max. Case Temp.	85℃
	Working Humidity	10% ~ 95% RH non-condensing
	Storage Temp. & Humidity	-40℃ ~ +80℃, 10% ~ 95% RH
Safety & EMC	Safety Standards	UL8750, CAN/CSA C22.2 No. 250.13-14, ENEC EN61347-1, EN61347-2-13 approved
	Withstand Voltage	I/P-O/P: 3.75KVAC
	Isolation Resistance	I/P-O/P: 100M Ohms / 500VDC / 25℃ / 70% RH
	EMC Emission	EN55015, EN61000-3-2, EN61000-3-3
	EMC Immunity	EN61547, EN61000-4-2,3,4,5,6,8,11, surge immunity Line-Line 1KV
Others	MTBF	193.6K hrs min. @ 230VAC full load and 25℃ ambient temperature
	Dimension	444x30.7x20.9mm (L*W*H)

- Ultra slim design for use in linear LED lighting
- 2 channel 12VDC/24VDC constant voltage output
- Class II power supply, full isolated metal case
- Built-in active PFC function
- PF > 0.95, Efficiency > 85%
- Low standby power < 0.5W
- Built-in RF wireless/PUSH LV dimming interface, radio frequency: 868/869.5/916.5/434mhz
- Compliant with Safety Extra Low Voltage standard
- Short circuit, over load, over temperature protection
- Can be compatible with a variety of RF remote controls
- Can be WiFi controlled via APP installed on IOS and Android systems
- IP20 rating, suitable for indoor LED lighting applications
- 5 years warranty


Safety & Warnings

- DO NOT install with power applied to the device.
- DO NOT expose the device to moisture.

Product Dimension

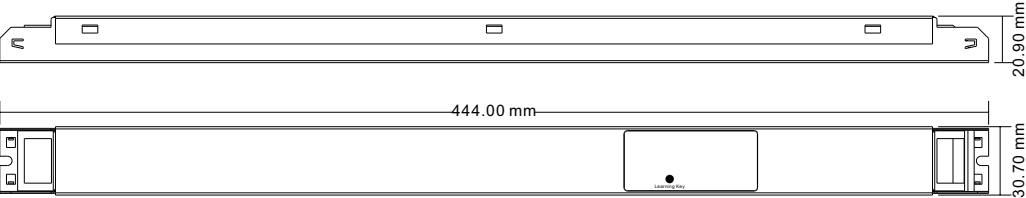

Option 1: have all the receivers in the same zone, like zone 1

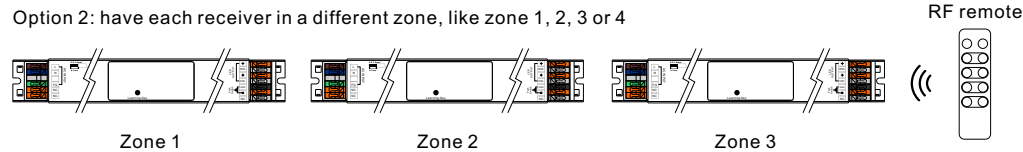

Do wiring according to connection diagram.

1. Connect and wire up the RF receiver correctly, power on.
2. Click on/off button of the remote/panel to turn on it → Click "Learning" key on the receiver → Click a zone number (ignore this step if the remote/panel has only 1 zone) → Touch the color wheel/slider (click any button except on/off and zone buttons if the remote has no color wheel/slider) → LED lights connected with the receiver will blink to indicate successful pairing to the selected zone

Pairing to RF sender without learning key (Applicable to RF senders with color wheel):

- quickly within 10 seconds → LED light connected with the receiver will flash to indicate successful pairing to the selected zone.

- Note:** RF remotes without color wheel, single zone RF touch panels with color wheel, and RF touch panels without color wheel do not have this function.

Re-power on the receiver three times continuously to set it into pairing status → Within 15 seconds, click on/off button of the remote/panel to turn on it → Click a zone number (ignore this step if the remote/panel has only 1 zone) → Touch the color wheel/slider (click any button except on/off and zone buttons if the remote has no color wheel/slider) → LED lights connected with the receiver will blink to indicate successful pairing to the selected zone

1. Wire up the RF receiver correctly, power on.
2. Press and hold down the " Learning Key" button on receiver for over 3 seconds until the connected led light on receiver flickers twice, which means well deleted.

1. When pairing single color LED light to a single color remote, it might be interfered and paired by nearby RGBW senders, which might control the single color light into running mode. The running mode can not be stopped by the paired single color remote or by delete pairing.
2. Then we need a remote or wall panel that has color wheel, and pair the remote or wall panel to the receiver via above mentioned pairing method "Pairing to RF sender without learning key (Applicable to RF senders with color wheel)", then touch the color wheel to stop the running mode.
3. Then delete pairing and pair the receiver to the single color remote again, it can be controlled by the remote again.

While connected with PUSH LV, click the button to switch ON/OFF lights. Press and hold down the button to increase/decrease light intensity.