



LEDTech LED Driver 150W 24V 6.25A IP67

Features & Benefits

- ✓ Recommended load 112W
- ✓ Suitable for outdoor use
- ✓ 215 x 64 x 45mm
- ✓ Highly efficient

Quick Specs

| | | |
|---------|---------|-----------|
| 24V | 150W | IP67 |
| Voltage | Wattage | IP Rating |

Full Specification

| | |
|------------------------|--|
| Product Code: | 100.529 |
| Rated Voltage | 24VDC |
| Output Current Range | 0 ~6.25A |
| Rated Power | 150W |
| Ripple and Noise (Max) | 200mVp-p |
| Voltage Tolerance | ±2.0% |
| Line Regulation | ±1% |
| Load Regulation | ±1.0% |
| Set-up, Rise Time | 1500ms 80ms/230VAC, 2000ms 80ms/110VAC |
| Hold-up Time | 50ms/230VAC at full load, 25ms/110VAC at full load |
| Voltage Range | 90~130VAC/170~264VAC |
| Frequency Range | 47~63Hz |
| Efficiency | 89.0% |
| AC Current | 1.91A ~ 0.62A |
| Inrush Current | Cold Start at 70A/230VAC, Input at Ta: 25°C cold start. |
| Leakage Current | <0.5mA at 230VAC, 60Hz Input |
| Over-Voltage | 110% ~ 130% (Shut down O/P voltage, re-power on to recover) |
| Over-load | 130% ~ 150% (Shut down O/P voltage, re-power on to recover) |
| Short Circuit | Hiccup mode, recovers automatically after faulty problem is removed |
| Lightning Protection | Gas discharge tube automatically open to discharge, re-power on to recover |
| Over-temperature | 85°C±10°C (Shut down O/P voltage, re-power on to recover) |
| Working Environment | -25°C ~ +50°C |
| Working Humidity | 20~90% RH non-condensing |


LED Technologies

Creative LED & Effect Technology for the Trade Professional

| | |
|--------------------------------|---|
| Storage Environment & Humidity | -40°C~+ 70°C |
| TEMP. Coefficient | ±0.05%/°C (0~50°C) |
| Vibration | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. Each along X, Y, Z axes |
| Safety Standards | EN-61347-1, EN61347-2-13, IP67, ROHS Tests, Design refer to UL8750 |
| Withstand Voltage | I/P-O/P: 3KVAC, IP-FG:1.5KVAC, OP-FG: 500VAC |
| Isolation Resistance | I/P-O/P IP-FG OP-FG: 100M Ohms/500VDC / 25°C / 70% RH |
| EMC Emission | Compliance to EN55015, EN61547, EN61000-3-2, EN61000-3-3, |
| EMC Immunity | Compliance to EN55015 EN61547 EN61000-4-2,3,4,5,6,8,11 |
| Life Span | ≥50000Hrs (25°C) |
| No Load power consumption | ≤3.0W |
| MTBF | 250K hrs min, MIL-HDBK-217F (25°C) |
| Dimension | 236*64*45 mm (L*W*H) |
| Weight | 1.15Kg |

Schematic Drawing

Units: mm

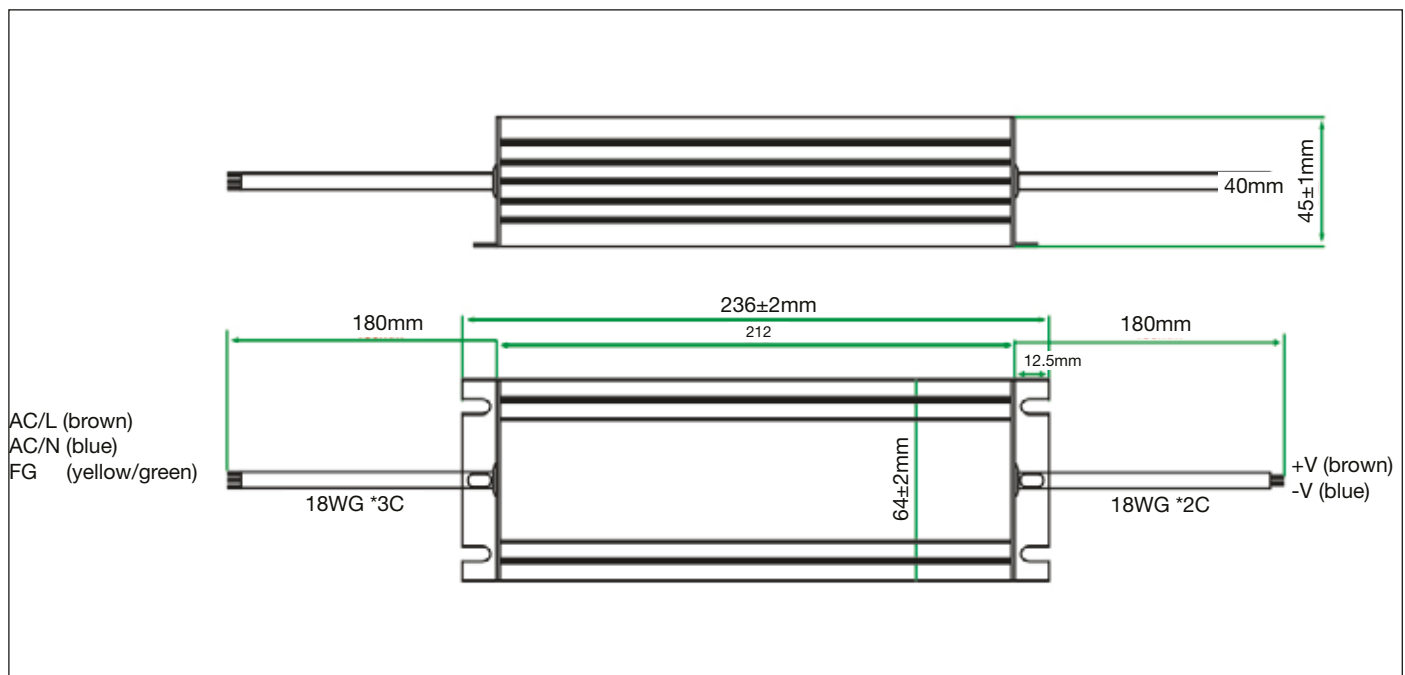

Technical Support

If you require any technical support or have an enquiry, please do not hesitate to contact one of our LED technical experts on the contact information provided.

Telephone: 01260 540014

Opening times: Mon-Thur: 9:00am - 5:30pm / Fri: 8:30am - 5:00pm

www.ledtechnologies.co.uk

The above data are typical values and may vary +/- 10%.

Colour temperatures may vary up to +/- 10%

We reserve the right to change specifications without notice - E&OE.

Maximum Daisy chain - 10mtrs

