
LED Technologies
Creative LED & Effect Technology for the Trade Professional

FLEXI
HONEYCOMB LED LIGHT SHEET

Honeycomb Flexi LED Light Sheet Pack 3pcs 32W 24V RGBW (4000K)

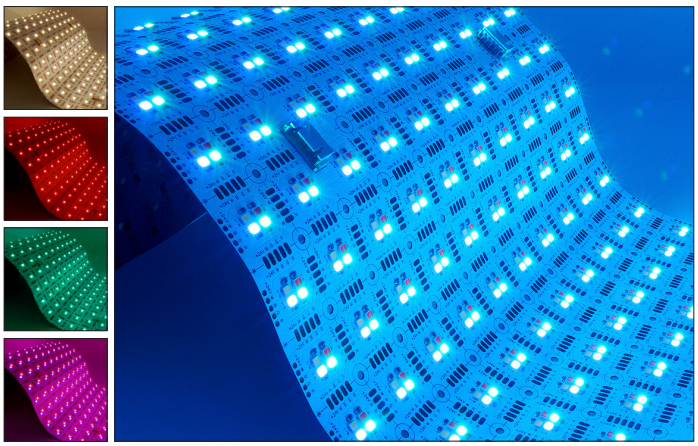

Product Code:	102.116
Product Type:	Flexible LED Light Sheet
Guarantee Period:	3 Years


Features & Benefits:


- Can be cut to size as required
- Very flexible
- 120º beam angle
- 800 x 2835 LEDs at 32W / sheet
- Colour changing RGBW (4000K)
- Light sheet size 480mm x 240mm
- Linkable up to 3 x Sheets together

400g /sheet *appx* **2oz** *PCB Weight*

Colour:	RGBW Colour Changing
Colour Temperature:	(W) 4000K
Power per Sheet:	32W
Current:	1.325A
Input Voltage:	24V DC
Cut Intervals:	24*24mm
LED Quantity per Sheet:	800 LEDs (200pcs each)
LED Type:	SMD2835
Cross Section:	480x240mm
Beam Angle:	120°
CRI Rating:	4000K: CRI>90
Lumens per LED:	2-3 lm/LED
Lumens per Sheet:	1635 lm
Light Intensity per LED	600-900 mcd
Power Consumption per Sheet:	32W/pcs
IP Rating:	IP20
Average LED Lifetime:	30,000 Hours
Sheet Size:	480 x 240 (mm)
Base Type (Both Sides):	Terminal Type
CE & RoHS	Yes
Continuous Run:	3x Light Sheets
Peelable Back:	300LSE 3M™

Dimensions (Unit: mm)

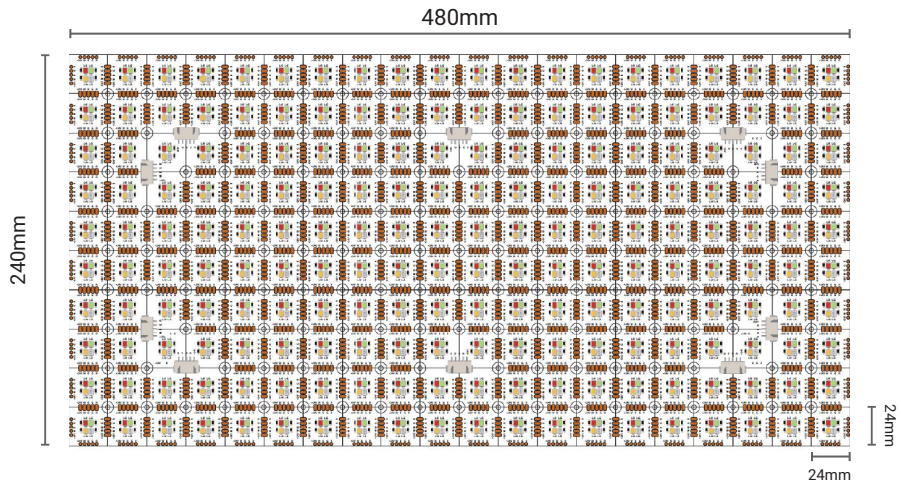

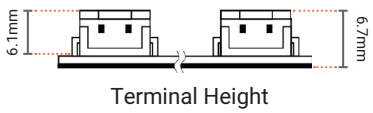



Notes:

- The RGBW (4000K) 32W Flexible LED Light Sheets can be cut around each set of 4 LEDs for a custom shape. The cutting points are situated along the black lines that run over the copper tabs along the LED Sheet in straight lines. We recommend using sharp scissors to carefully cut the sheet.
- This Flexible LED Light Sheet has a maximum bending diameter of 100mm. We don't recommend bending the product tighter than this, as it may cause damage to the LEDs.

We reserve the right to change specifications without notice. E&OE. If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

UK CA | CE | RoHS Compliant

Opening times
Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm


Telephone: 01260 540014
www.ledtechnologies.co.uk

LED Technologies
Creative LED & Effect Technology for the Trade Professional


FLEXI
HONEYCOMB LED LIGHT SHEET

Honeycomb Flexi LED Light Sheet Pack 3pcs 32W 24V RGBW (4000K)

102.116 Connection Diagram

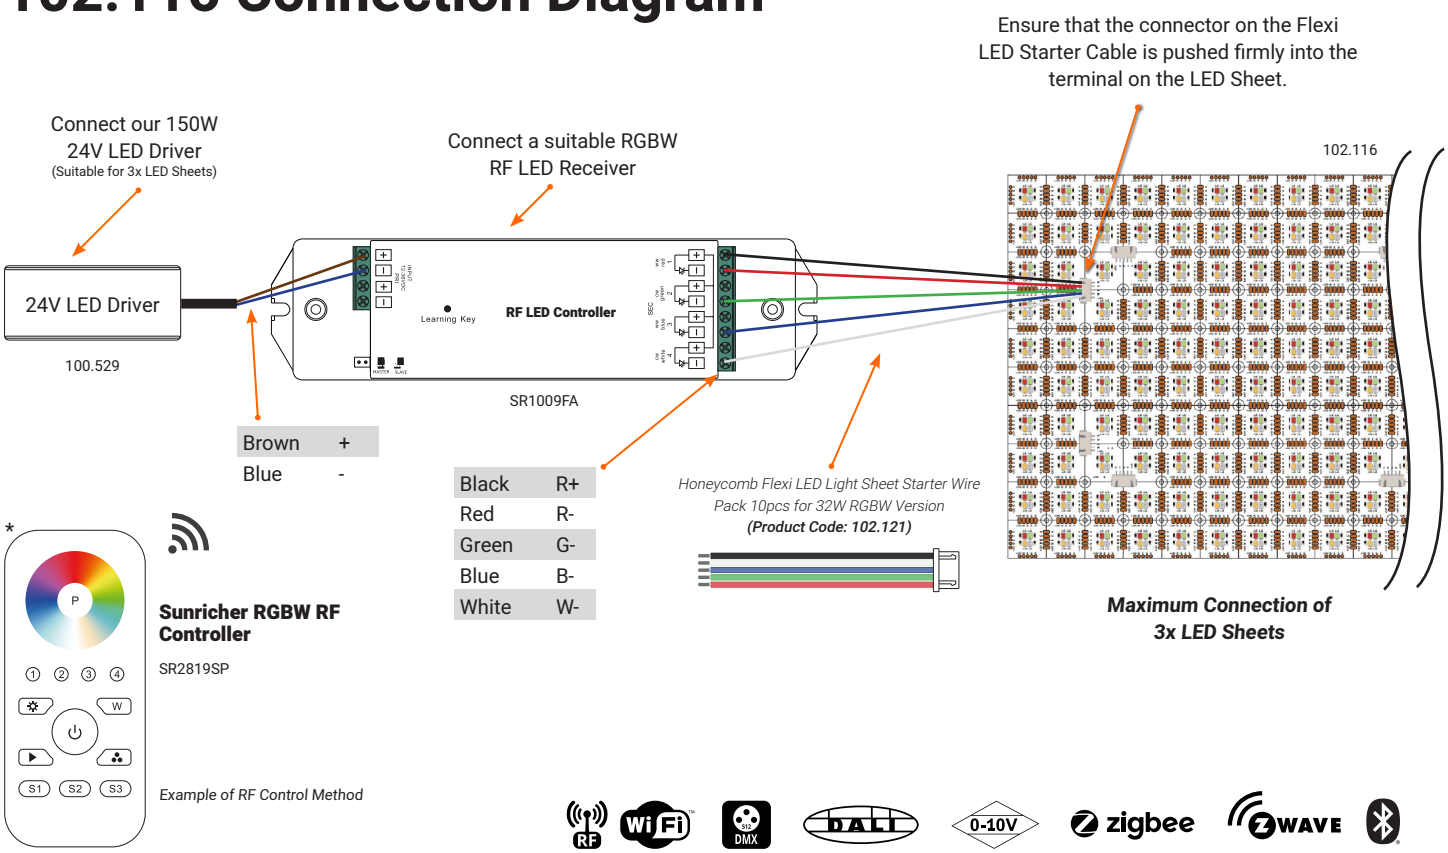

RF WiFi DMX DALI 0-10V zigbee Z-WAVE

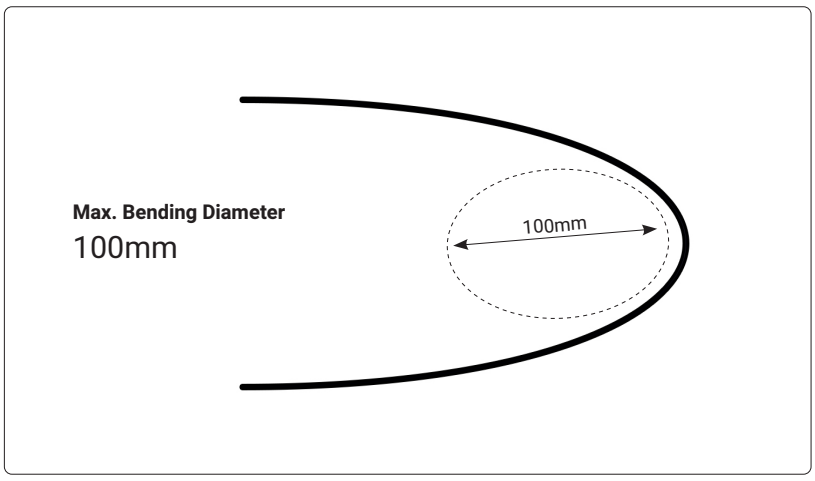



Notes:

- This Flexible LED Light Sheet product is powered by 32W, so we recommend using our **150W 24V LED Driver** *(100.529)* to safely power **3x Sheets**.
- Ensure that the Starter Cable *(102.121)* wires are connected to the correct terminals on the suitable LED Receiver chosen. Please see the diagram above for the correct terminals.
- **Our range of Flexible Light Sheets is not limited to RF Control Methods. Many other control options are available for our Flexi range, including DMX, DALI ZiGBEE & more.*

+10% Tolerance on all Specifications. Colours can be variable.

We reserve the right to change specifications without notice. E&OE. If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

UK CA CE RoHS Compliant

Opening times
Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm


Telephone: 01260 540014
www.ledtechnologies.co.uk

LED Technologies
Creative LED & Effect Technology for the Trade Professional

FLEXI
HONEYCOMB LED LIGHT SHEET

Honeycomb Flexi LED Light Sheet Pack 3pcs 32W 24V RGBW (4000K)

102.116 Cutting Suggestions

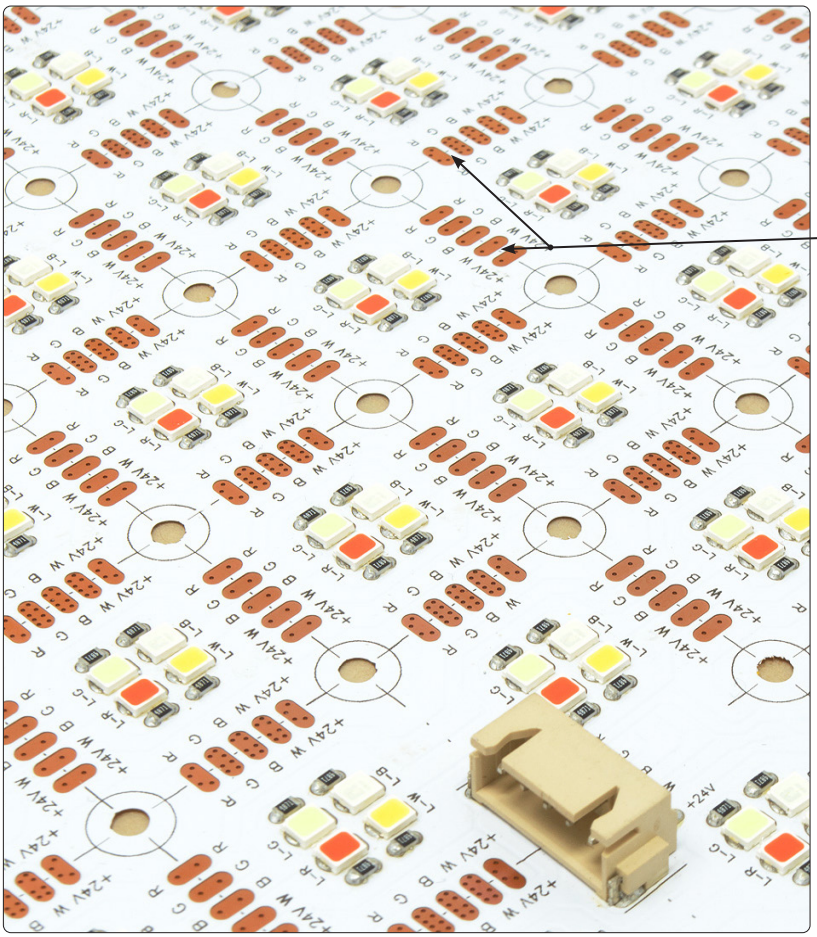

General Cutting Suggestions:

1. Our range of 32W RGBW (4000K) Flexible LED Light Sheets can be cut along the black lines that run through the copper tabs printed on the Sheet PCB.
2. This LED Sheet can also be cut in straight lines across the copper tabs that enclose the sets of 4 LED Chips. This allows you to create custom square/rectangular shapes to fit your designs.
3. Be sure to use a sharp pair of scissors to make a clean cut through the sheet to avoid damaging the LEDs and PCB. **We recommend cutting from the edges when using scissors.**

Cutting from the Centre Suggestions:

1. To make a clean cut from the centre of the Flexible LED Light Sheets, we recommend using a sharp Stanley Knife, with a ruler as a guide to keep the cut as straight as possible to avoid damaging the PCB
2. Be careful not to press too hard on the LED Sheet when using the ruler as a straight guide
3. Once a cut has been made using the Stanley Knife, you can continue using a sharp pair of scissors along the black lines to finish cutting out the shape you require for your installation.

Recommended Tools



Sharp Scissors



Sharp Stanley Knife



Strong Ruler

UK CA | CE | RoHS Compliant

+10% Tolerance on all Specifications. Colours can be variable.

We reserve the right to change specifications without notice. E&OE. If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Opening times
Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm

Telephone: 01260 540014
www.ledtechnologies.co.uk