

LED Technologies

Creative LED & Effect Technology for the Trade Professional

Since 2008

U S E R M A N U A L

Cordless LED Table Lamps

Product User Manual

LED Technologies would like to thank you for your purchase of our Cordless LED Table Lamps. We hope that you enjoy these spectacular products.

If you have any feedback regarding our Table Lamps, we would be very interested in hearing it. Please leave a review on our Google page for our team to see your feedback.

Contacting LED Technologies

If you have any faults with your products, our technical sales team will be happy to provide the necessary technical support to resolve any issues you may be having with the product. Our technical Sales Team are available between 8:30am to 5:00pm from Monday to Thursday and 08:30am to 4:30pm on a Friday.



01260 540014



sales@ledtechnologies.co.uk


Warranty UK Mainland

We give you complete peace of mind with our two (2) year warranty, (excluding batteries) If your item is faulty, please contact our technical sales team within the warranty period and they will provide support on determining the fault.

Activating your LED Lamps

To activate your Cordless LED Lamp, press the on/off button located at the bottom of the Lamp (See diagram below). Once pressed, the lamp should switch on to the first setting (Default white colour). If your lamp fails to turn on after the button has been pressed, ensure that the LED Lamp is fully charged (See charging guide for further information on charging your lamp).

Base of Lamp

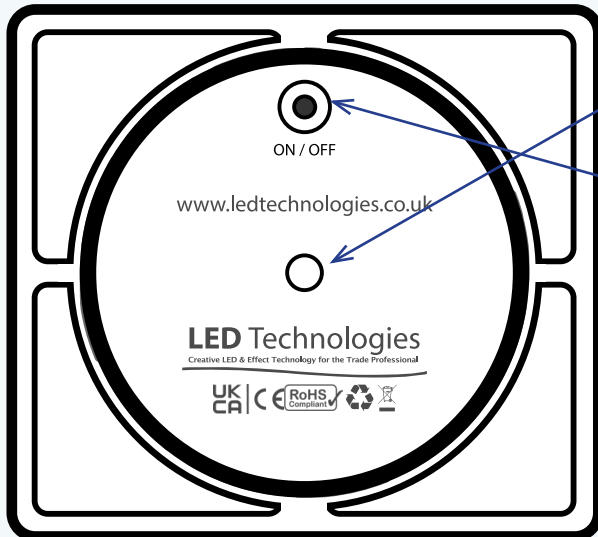

Charging Port:

Slot the base of the lamp on to a charging dock. Ensure the charging hole is securely fitted.

Manual Control Button:

The manual button is limited to 5 settings to manually change the colour and to turn the lamp on and off.

1st press: Turns the lamp on (Default white colour)

2nd press: Changes the colour of the lamp to blue

3rd press: Changes the colour of the lamp to purple

4th press: Starts fading through the colours

5th press: Turns the lamp off


How to Recharge your LED Lamps

When your LED Lamp needs recharging, you will need one of the charging trays or trolley supplied by LED Technologies. Insert the adapter to the power supply in to the input of your chosen charging dock. **Inputs may vary depending on charging tray or trolley.*

*The lamp must be **turned off** before placing it on the charging tray.*

To charge your Cordless LED Table Lamp, place the lamp on to the charging tray, ensuring that the hole in the base of the lamp is secured on to the raised peg situated on either side of the charging tray. **Please note that charging methods may vary depending on the chosen charging station.*

Red light indicators are situated in the middle of the tray to indicate if the charging tray is turned on. The lamp will glow red while charging and will turn green when it is fully charged. The indicator lights in the middle of the tray will remain red.

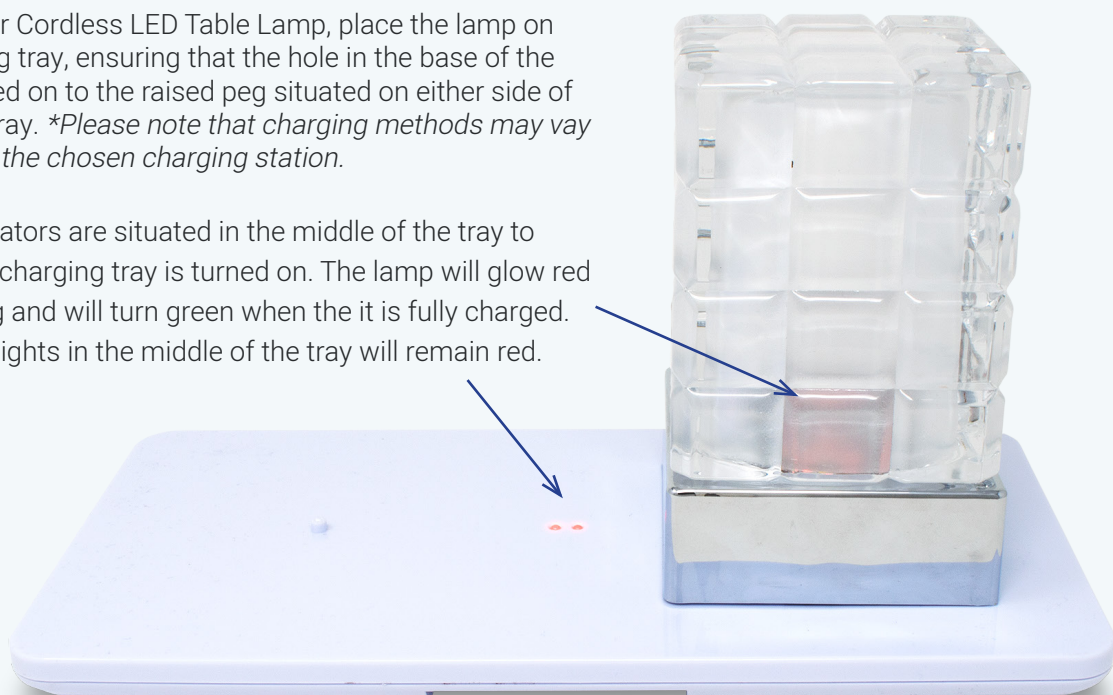


Controlling Your LED Lamps

To control your Cordless LED Lamp, you will need to purchase the Remote Control for our LED Table Lamps (Sold Separately). The remote comes with a plastic tag at the bottom of the remote where the battery tray is, you will need to remove the plastic tag for the remote to start working.

The LED remote comes pre-paired to your LED Lamps, so no pairing process will be required to operate your Lamps. Please see the diagram below detailing the features of the remote control.

LED Lamp Remote

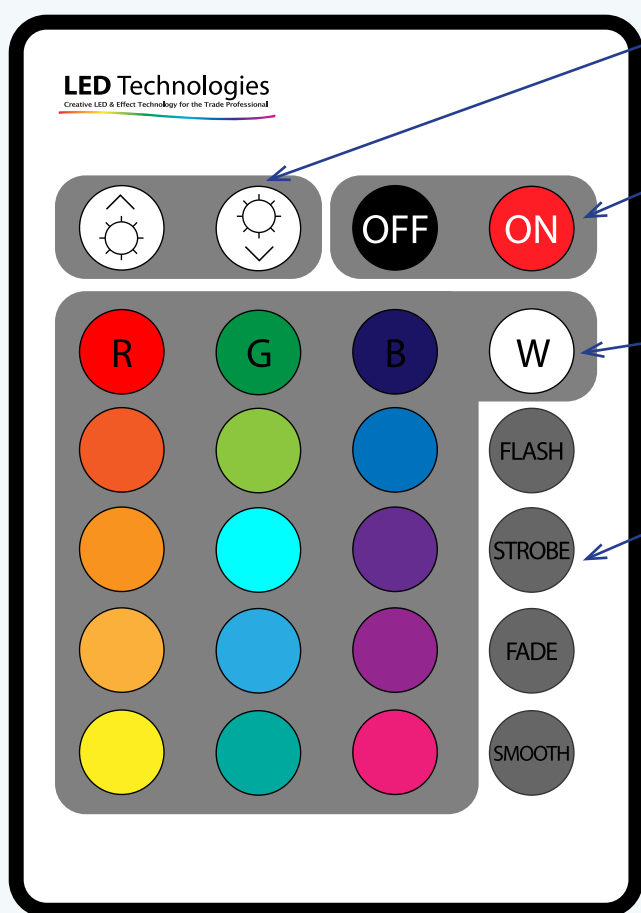

Brightness Control:

The brightness control buttons will cycle through four levels of brightness.

On/Off (Power) buttons:

The power buttons will instantly turn the lamp on and off. If there are multiple lamps in an area, the buttons will turn all the lamps on or off together.

Colour selection:

Choose between sixteen colour options by simply pressing the corresponding colour button. A white colour option is also available.

Colour effects:

The lamps feature pre-set colour effects, controlled by the four effect buttons.

Flash: The lamp will quickly cycle through the colours*

Strobe: Similar to Flash but the lamp will remain on each colour for a longer duration.*

Fade: The lamp will slowly fade through the selection of colours.*

Smooth: The lamp will fade through the selection of colours in quick succession.*

Product Code:

101.933

When controlling multiple LED Lamp units, the LED controller will apply the above functions to all lamps within the area, however the lamps will not keep *synchronisation if you set any auto colour changing.

Remote Control Battery Maintenance

The remote control comes with a Lithium CR2025 Button Battery already installed. If you need to replace the battery at any point, please follow the instructions on the back of the remote to release the battery tray. (Please see picture for reference).

The tray is released by clamping the ***latch** and then pulling the tray down from the remote.

Please ensure when replacing the battery you install a premium brand battery as this will ensure all functions work correctly.

LED Lamp Remote (Back)




Lamp Battery Maintenance

The Cordless LED Table Lamps are powered by a replaceable & Rechargeable lithium-ion battery pack. The leds have an average life of 30,000 hours when handled and operated with care. Battery life is variable depending on the environment and number of re-charge cycles and we cannot guarantee the battery life.

Please read the following tips on maintaining the quality of your Lamp Battery.

1. Rechargeable batteries should be charged frequently
2. Ensure the lamp is charged at least once a month
3. When storing unused LED Lamps, ensure they are fully charged and manually switched off via the button on the bottom of the base.

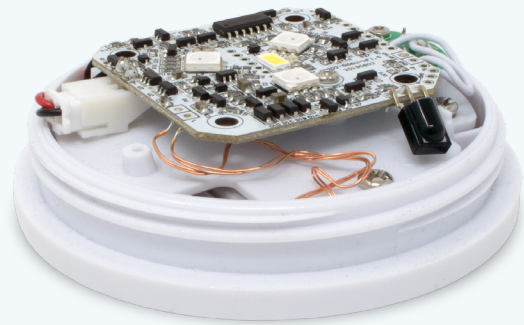

| | |
|----------------------|---------|
| Product Code: | 101.944 |
|----------------------|---------|

If a fault occurs with your LED Lamp battery pack, contact our technical sales team to attempt to resolve the issue over the phone. If the battery pack remains faulty after technical advice, replacement battery packs can be purchased online at www.ledtechnologies.co.uk.

Replacing the LED Battery Pack (Product Code: 101.944)

To replace the battery pack of your Cordless LED Lamp, simply unscrew the base of the lamp until the bottom unit comes free from the shade.

Take your replacement battery pack and screw it in place to the Lamp Shade ensuring that the base is tightly screwed on to prevent any water ingress or dust entering the unit. Activate the lamp by pressing the on/off button situated on the bottom of the Lamp to make sure the new battery works as intended. We highly recommend placing the Lamp on charge with the new battery pack to ensure it is fully charged before being operated.

Important Information

- The chargers and accessories are sold separately to the lamps. Both are required to operate the lamp
- Do not place your lamp on unstable or hot surfaces. This will prevent accidental damage to the unit
- Do not place your lamp on a charger if the power cord is damaged as this could cause damage to the lamp
- These lamps are not suitable for immersing into water. The lamps are IP44 rated, suitable for small splashes
- The lamp should be used & recharged regularly to ensure longevity of the battery
- Always use the correct adapter to charge the lamps. Do not exceed the recommended charging voltage (5V)

5V Power Adapter

The Cordless LED Lamps are charged via a 5V Power Adapter plugged in to the charging trays. Replacement 5V Power Adapters can be purchased online at www.ledtechnologies.co.uk.

When powering the charging trays, ensure that the jack from the power adapter is securely fitted in the tray and the plug is pushed properly in to a UK mains power socket. If either are loose, it may impair the charging process and cause electrical faults.



| | |
|----------------------|---------|
| Product Code: | 101.945 |
|----------------------|---------|