


## Octowash Flexible Wall Washer Strip 4000K 5mtr 24V

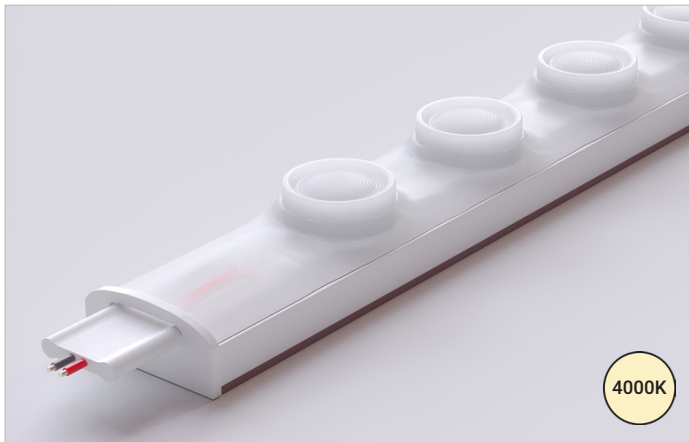

Product Code:	101.210
Product Type:	Octowash Wall Washer
Guarantee Period:	3 Years

### Features & Benefits:

- Natural White (4000K)
- UV Resistant with an IP67 Rating
- 90W with a CRI >90
- 5 Metre Wall Washer
- 45° Optics
- Wide variety of applications
- Flexible and Easy to install
- Cost effective with a 3 year warranty included




800g appx



Colour:	Cool White
Colour Temperature:	4000K
Power:	90W
Current:	750mA/M
Input Voltage:	24V DC
LED Spacing:	20.83mm
Cut Intervals:	125mm appx
LED Quantity:	48 LEDs per Metre
LED Type:	SMD2835
Beam Angle:	45°
CRI Rating:	>90
Lumens per LED:	33-34LM per LED
Lumens per Metre:	1620LM per Metre
Light Intensity per LED:	10100mcd
Power Consumption per Metre:	18W
IP Rating:	IP67
Average LED lifetime:	50,000 Hours
Reel Size:	18.5 x 9.5 x 5020 (mm)
Base Type:	100cm Tails at both ends
CE & RoHS:	Yes
Illumination Distance:	>10m
Peelable Back:	TVHB 3M

### Dimensions (Unit: mm)

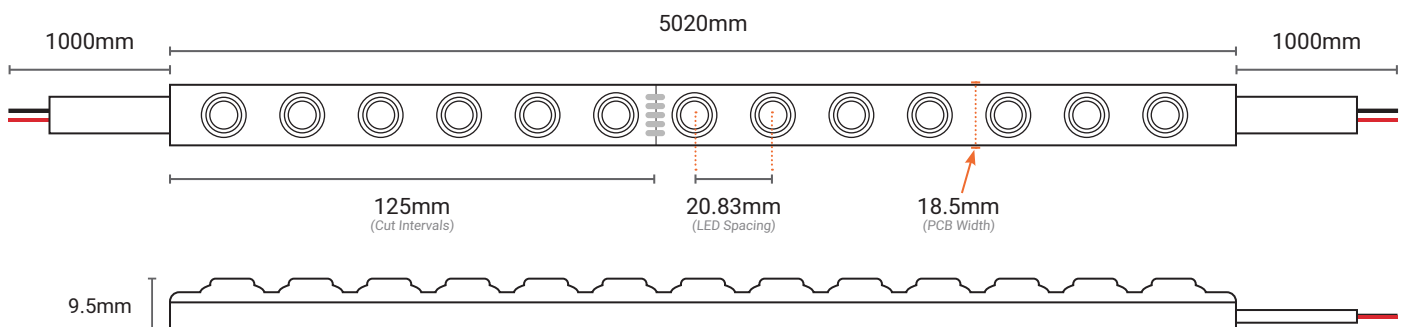

### Notes:

- Octowash Wall Washer strip may be cut to length only if really necessary.
- To locate the cutting points, the 3M Sticky Back needs to be peeled slightly to show the cutting points, they will show as a dashed line with a scissors icon above it.
- Cutting the Octowash will reduce the IP rating to IP65 and you will need to seal it correctly to maintain the IP65 Rating for installations where the Octowash may be subject to splashes.

We reserve the right to change specifications without notice. E&OE

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.



Telephone: 01260 540014


Opening times: Mon-Thur: 8:30am - 5:00pm

Fri: 8:30am - 4:30pm

[www.ledtechnologies.co.uk](http://www.ledtechnologies.co.uk)

## Octowash Flexible Wall Washer Strip 4000K 5mtr 24V


### 101.210 Connection Diagram

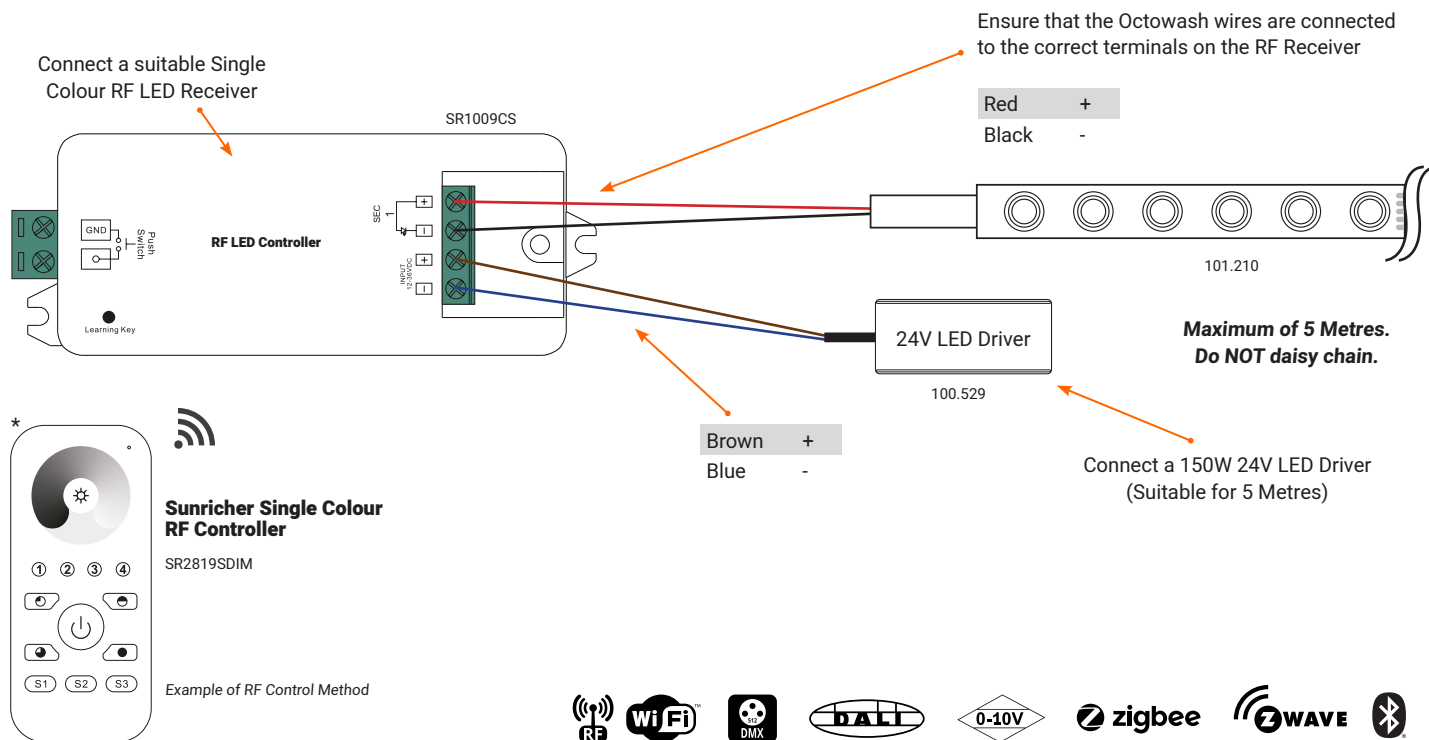

#### Notes:

- The 4000K Octowash strip is powered by 90W, so we recommend a **150W LED Driver** (100.529) to safely power **5 Metres** of the Octowash.
- Ensure that the Octowash wires are connected to the correct terminals on the suitable LED Receiver chosen. Please see the diagram above for the correct terminals to attach each wire to.
- \*Our range of Octowash Strip is not limited to RF Control Methods. Many other control options are available for the Octowash LED Wall Washer Strip including DMX, DALI ZIGBEE & more.

#### Accessories (Sold Separately)

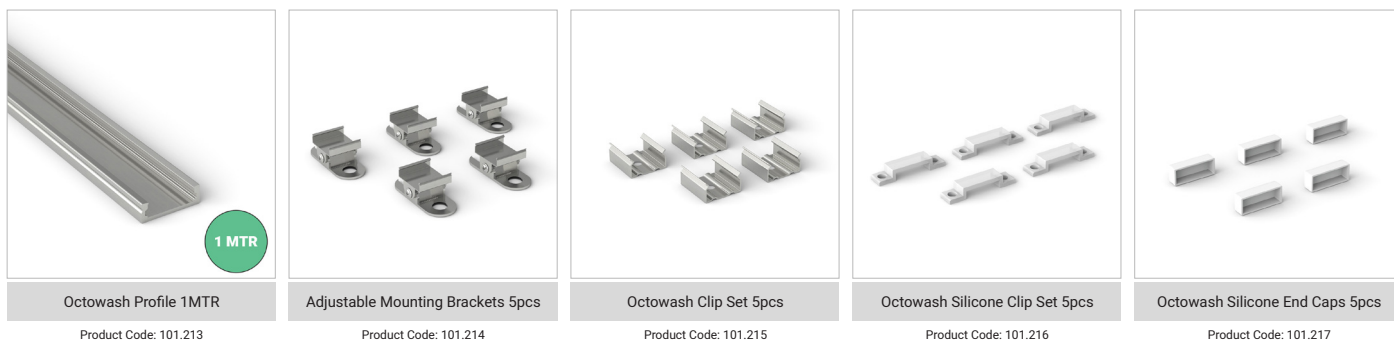

**+10% Tolerance on all Specifications. Colours can be variable.**  
**We reserve the right to change specifications without notice. E&OE**

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Telephone: **01260 540014**  
Opening times: Mon-Thur: 8:30am - 5:00pm  
Fri: 8:30am - 4:30pm  
[www.ledtechnologies.co.uk](http://www.ledtechnologies.co.uk)

