LED Technologies
Creative LED & Effect Technology for the Trade Professional

LED Tech
LIFESTYLE

Lifestyle Excellence RGB LED Strip 50 Metres 24V 72W IP20



Product Code:	102.315
Product Type:	Lifestyle LED Strip
Guarantee Period:	3 Years

Features & Benefits:


- RGB LED Strip Light
- 12mm Wide 2oz PCB
- 60 x Colour LED's Per Metre
- 14.4W Per Metre – 606 Lumens Per Metre
- CRI Rating N/A
- 3 Year warranty
- 50 Metre Roll Powered One End

1.5kg *appx*

24V

Colour:	RGB
Colour Temperature:	RGB
Power:	72W
Current:	600mA/M
Input Voltage:	24V DC
LED Spacing:	16.7mm
Cut Intervals:	100mm
LED Quantity:	60 LEDs per Metre
LED Type:	SMD5050
Beam Angle:	120°
CRI Rating:	N/A
Lumens per LED:	6lm
Lumens per Metre:	500lm per Metre
Light Intensity per LED:	2400-3000mcd
Power Consumption per Metre:	14.4W
IP Rating:	IP20
Average LED lifetime:	50,000 Hours
Reel Size:	10 x 1.9 x 50,000 (mm)
Base Type:	20cm Tails at both ends
CE & RoHS:	Yes
Continuous Run:	5 Metres
Peelable Back:	300LSE 3M adhesive tape

Dimensions (Unit: mm)

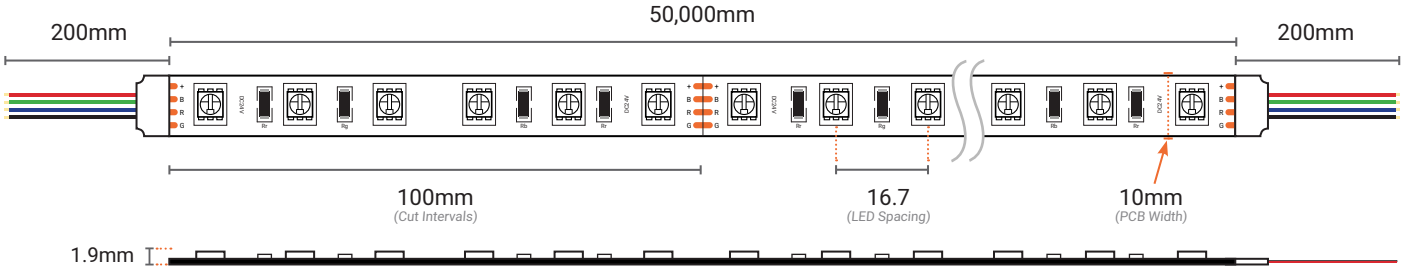

Notes:

- The LED Strip cutting points are situated 100mm apart from each other. The cutting marks are located on the five copper tabs every 100mm . The LED Strip must **NOT** be cut anywhere else.
- Although the strip is supplied on a 50 metre reel, the LED strip must only be powered in **maximum lengths of 5 Metres** (Powered from one end).

UK CA | CE | RoHS Compliant

We reserve the right to change specifications without notice. E&OE

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.


Telephone: 01260 540014
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
www.ledtechnologies.co.uk


LED Technologies
Creative LED & Effect Technology for the Trade Professional

LED Tech
LIFESTYLE

Lifestyle Excellence RGB LED Strip 50 Metres 24V 72W IP20

102.315 Connection Diagram

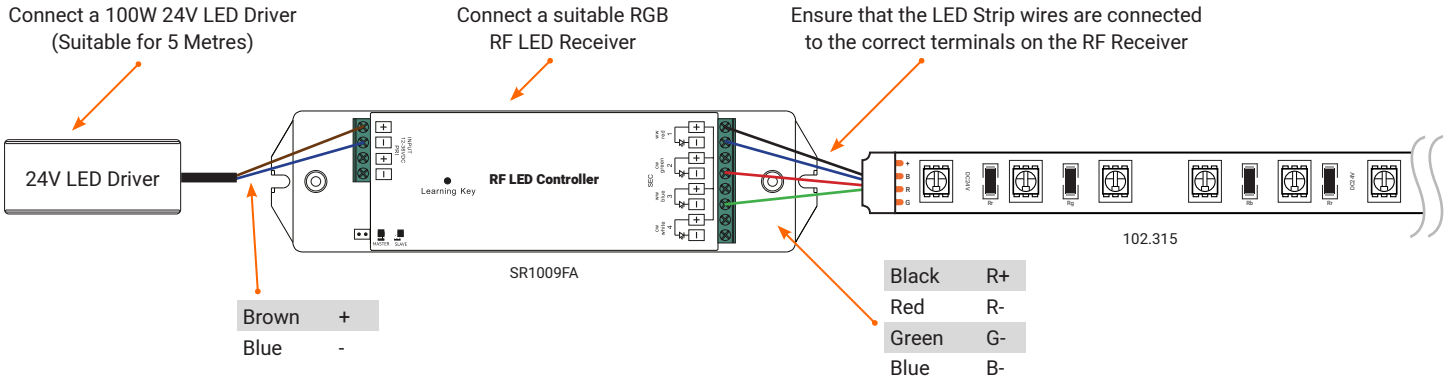



Sunricher RGBW RF Controller

SR2819SP

Example of RF Control Method

RF WiFi DMX DALI 0-10V zigbee Z-WAVE

Notes:

- The Strip is powered by 72W, so we recommend a **100W LED Driver** to safely power **5 Metres** of the strip.
- Ensure that the LED Strip wires are connected to the correct terminals on the suitable LED Receiver chosen. Please see the diagram above for the correct terminals to attach each wire to.
- **Our range of LED Strip is not limited to RF Control Methods. Many other control options are available for the LED Strip including DMX, DALI ZiGBEE & more.*

+10% Tolerance on all Specifications. Colours can be variable.
We reserve the right to change specifications without notice. E&OE

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Telephone: 01260 540014
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
www.ledtechnologies.co.uk

UKCA CE RoHS Compliant