


SideWinder Letter Bendable RGB LED Strip - 60W IP20 24V

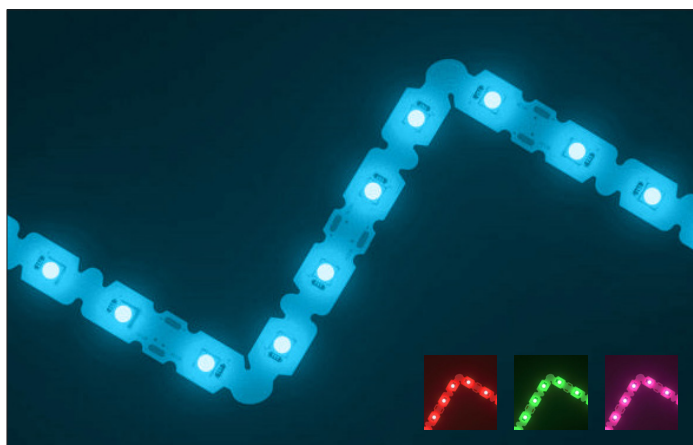

Product Code:	100.667
Product Type:	SideWinder LED Strip
Guarantee Period:	3 Years


Features & Benefits:

- RGB Colour Changing
- 42 X 5050 LED's Per Metre
- 24V / 60W
- 90° degree bendable
- Extremely bright RGB Light
- Can be bent at every LED
- 3 Year warranty
- 5 Metre Roll



Colour:	RGB
Colour Wavelength:	N/A
Power:	60W
Current:	600mA/M
Input Voltage:	24V DC
LED Spacing:	23.8mm
Cut Intervals:	142.8mm
LED Quantity:	42 LEDs per Metre
LED Type:	SMD5050
Beam Angle:	120°
CRI Rating:	N/A
Lumens per LED:	12LM per LED
Lumens per Metre:	500LM per Metre
Light Intensity per LED:	3600mcd
Power Consumption per Metre:	10W
IP Rating:	IP20
Average LED lifetime:	50,000 Hours
Reel Size:	12 x 2.2 x 5000 (mm)
Base Type:	30cm Tails at both ends
CE & RoHS:	Yes
Continuous Run:	5 Metres
Peelable Back:	300LSE 3M Tape

Dimensions (Unit: mm)

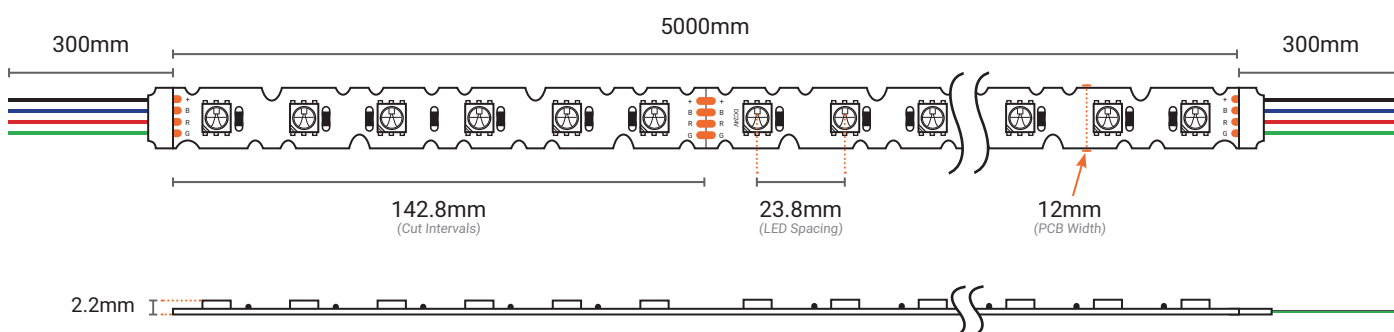

Notes:

- The LED Strip cutting points are situated 142.8mm apart from each other. The cutting marks are shown as a line through 5 copper tabs. The LED Strip must **NOT** be cut anywhere else.
- The SideWinder LED Strip features cutouts throughout the tape that allow the Strip to be bent at 90° angles, around corners, shapes and letters, making this Strip perfect for backlighting.




We reserve the right to change specifications without notice. E&OE

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Telephone: **01260 540014**
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
www.ledtechnologies.co.uk

SideWinder Letter Bendable RGB LED Strip - 60W IP20 24V

100.667 Connection Diagram

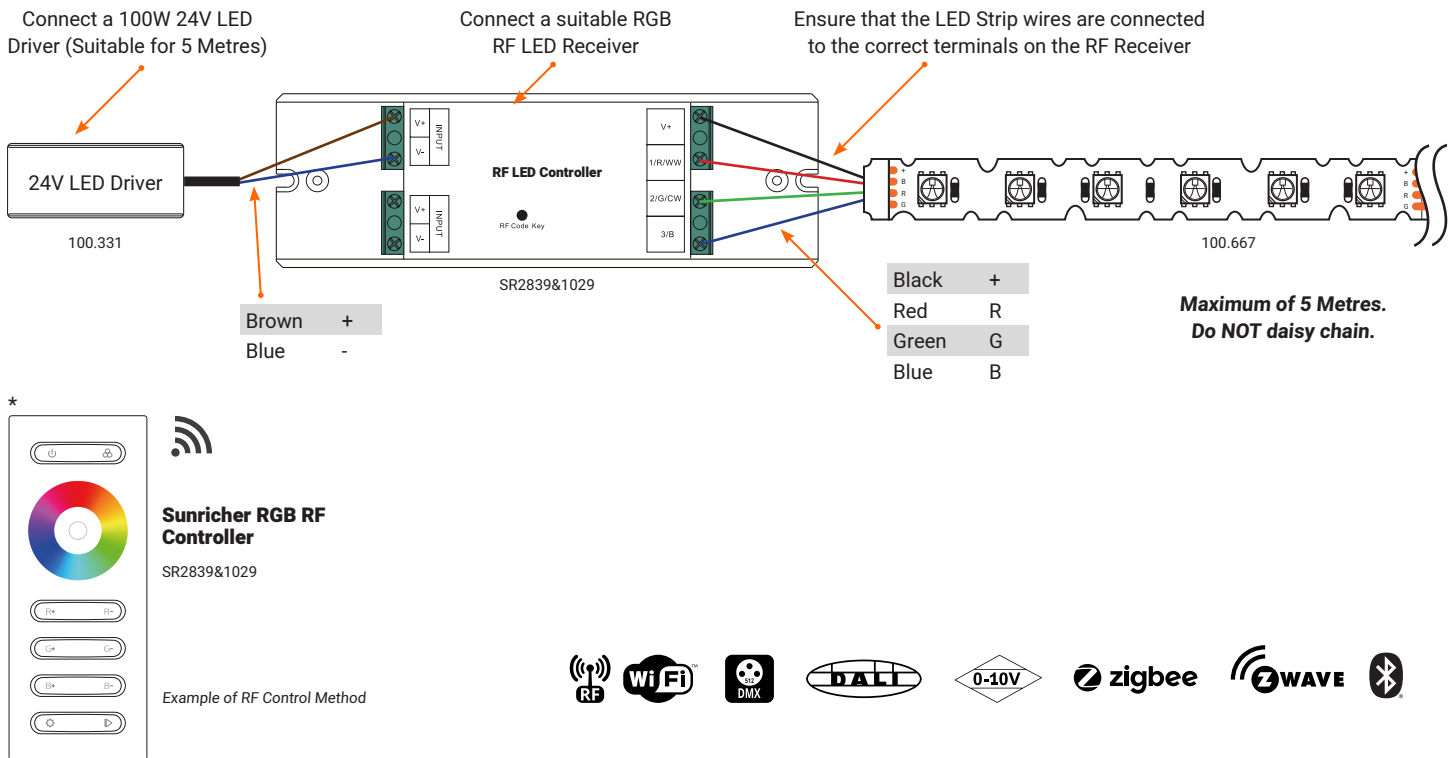

Notes:

- The SideWinder LED Strip is powered by 60W, so we recommend a **100W LED Driver (100.331)** to safely power **5 Metres** of the strip.
- Ensure that the LED Strip wires are connected to the correct terminals on the suitable LED Receiver chosen. Please see the diagram above for the correct terminals to attach each wire to.
- *Our range of LED Strip is not limited to RF Control Methods. Many other control options are available for the LED SideWinder Strip including DMX, DALI ZIGBEE & more.

+10% Tolerance on all Specifications. Colours can be variable.
We reserve the right to change specifications without notice. E&OE

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Telephone: **01260 540014**
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
UK CA | **CE** | **RoHS Compliant**
www.ledtechnologies.co.uk