

Octowash Flexible Wall Washer Strip RGBW (4000K) 5mtr 24V



Product Code:	101.212
Product Type:	Octowash Wall Washer
Guarantee Period:	3 Years

Features & Benefits:


- RGBW (4000K) Full Colour Palette
- UV Resistant with an IP67 Rating
- 40W with a CRI >80
- 5 Metre Wall Washer
- 45° Optics
- Wide variety of applications
- Flexible and Easy to install
- Cost effective with a 3 year warranty included

 **800g** appx



Colour:	RGBW
Colour Temperature:	4000K
Power:	40W
Current:	333mA/M
Input Voltage:	24V DC
LED Spacing:	23.8mm
Cut Intervals:	166.67mm appx
LED Quantity:	42 LEDs per Metre
LED Type:	SMD3535
Beam Angle:	45°
CRI Rating:	>80
Lumens per LED:	11-12LM per LED
Lumens per Metre:	470LM per Metre
Light Intensity per LED:	3300mcd
Power Consumption per Metre:	8W
IP Rating:	IP67
Average LED lifetime:	30,000 Hours
Reel Size:	18.5 x 9.5 x 5020 (mm)
Base Type:	100cm Tails at both ends
CE & RoHS:	Yes
Illumination Distance:	>8m
Peelable Back:	TVHB 3M

Dimensions (Unit: mm)

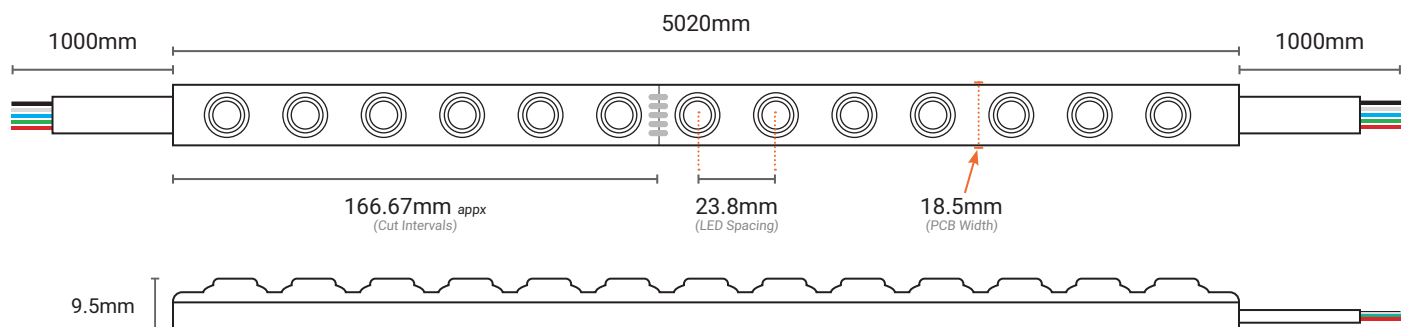

Notes:

- Octowash Wall Washer strip may be cut to length only if really necessary.
- To locate the cutting points, the 3M Sticky Back needs to be peeled slightly to show the cutting points, they will show as a dashed line with a scissors icon above it.
- Cutting the Octowash will reduce the IP rating to IP65 and you will need to seal it correctly to maintain the IP65 Rating for installations where the Octowash may be subject to splashes.

We reserve the right to change specifications without notice. E&OE


If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.



Telephone: **01260 540014**
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
www.ledtechnologies.co.uk

Octowash Flexible Wall Washer Strip RGBW (4000K) 5mtr 24V

101.212 Connection Diagram

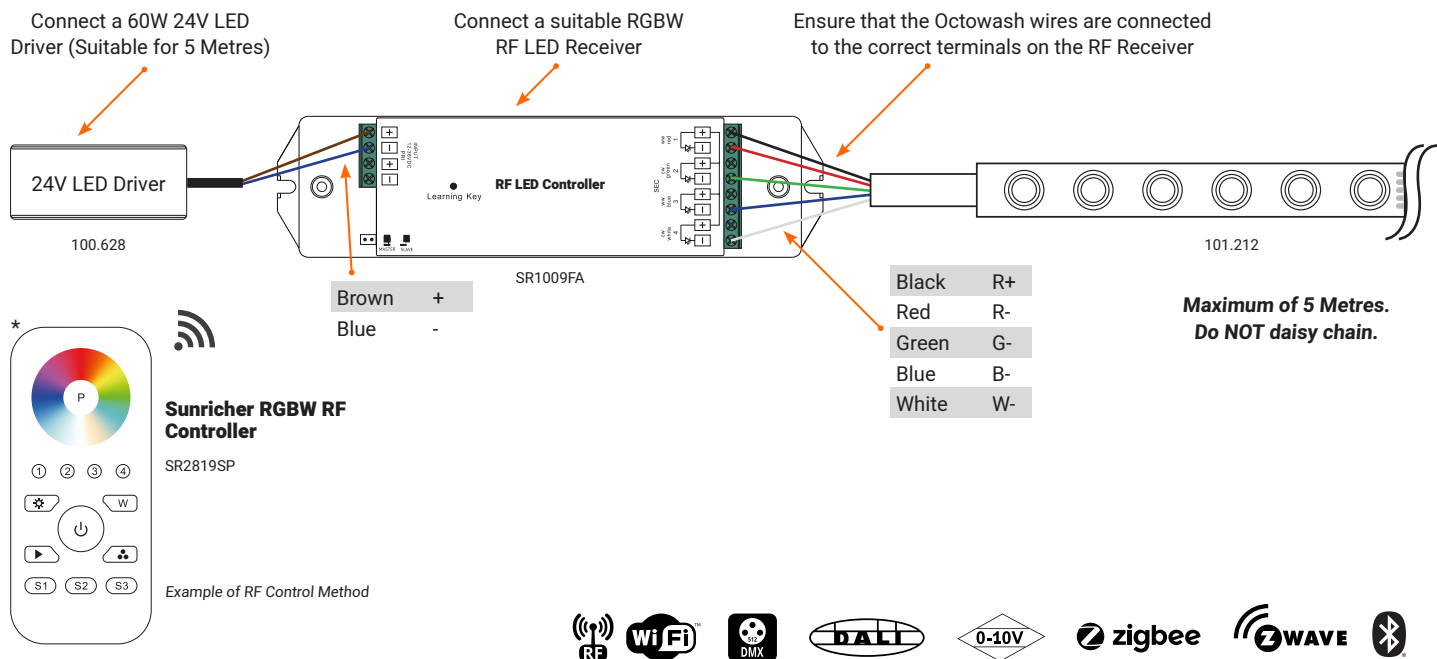

Notes:

- The RGBW Octowash strip is powered by 40W, so we recommend a **60W LED Driver (100.628)** to safely power **5 Metres** of the Octowash.
- Ensure that the Octowash wires are connected to the correct terminals on the suitable LED Receiver chosen. Please see the diagram above for the correct terminals to attach each wire to.
- *Important:** Our range of Octowash Strip is not limited to RF Control Methods. Many other control options are available for the Octowash LED Wall Washer Strip including DMX, DALI ZIGBEE & more.

Accessories (Sold Separately)



+10% Tolerance on all Specifications. Colours can be variable.
We reserve the right to change specifications without notice. E&OE

If you require Technical support or for general enquiries, please do not hesitate to contact one of our LED Technical experts on the contact information provided.

Telephone: **01260 540014**
Opening times: Mon-Thur: 8:30am - 5:00pm
Fri: 8:30am - 4:30pm
UK CA | CE | RoHS Compliant
www.ledtechnologies.co.uk